

Hardware Locality (hwloc)

0.9.3

Generated by Doxygen 1.6.1

Tue Nov 24 21:47:26 2009

Contents

1	hwloc	1
1.1	Introduction	1
1.2	Installation	2
1.3	Examples	3
1.4	Programming interface	5
1.5	API example	6
1.6	Questions and bugs	9
1.7	History / credits	9
1.8	Glossary	10
2	Module Index	13
2.1	Modules	13
3	Data Structure Index	15
3.1	Data Structures	15
4	Module Documentation	17
4.1	Topology context	17
4.1.1	Typedef Documentation	17
4.1.1.1	hwloc_topology_t	17
4.2	Topology Object Types	18
4.2.1	Define Documentation	18
4.2.1.1	HWLOC_TYPE_UNORDERED	18
4.2.2	Enumeration Type Documentation	18

4.2.2.1	hwloc_obj_type_t	18
4.2.3	Function Documentation	19
4.2.3.1	hwloc_compare_types	19
4.3	Topology Objects	20
4.3.1	Typedef Documentation	20
4.3.1.1	hwloc_obj_t	20
4.4	Create and Destroy Topologies	21
4.4.1	Function Documentation	21
4.4.1.1	hwloc_topology_check	21
4.4.1.2	hwloc_topology_destroy	21
4.4.1.3	hwloc_topology_init	21
4.4.1.4	hwloc_topology_load	22
4.5	Configure Topology Detection	23
4.5.1	Detailed Description	24
4.5.2	Enumeration Type Documentation	24
4.5.2.1	hwloc_topology_flags_e	24
4.5.3	Function Documentation	24
4.5.3.1	hwloc_topology_ignore_all_keep_structure	24
4.5.3.2	hwloc_topology_ignore_type	24
4.5.3.3	hwloc_topology_ignore_type_keep_structure	25
4.5.3.4	hwloc_topology_set_flags	25
4.5.3.5	hwloc_topology_set_fsroot	25
4.5.3.6	hwloc_topology_set_synthetic	25
4.5.3.7	hwloc_topology_set_xml	26
4.6	Get some Topology Information	27
4.6.1	Define Documentation	27
4.6.1.1	HWLOC_TYPE_DEPTH_MULTIPLE	27
4.6.1.2	HWLOC_TYPE_DEPTH_UNKNOWN	28
4.6.2	Function Documentation	28
4.6.2.1	hwloc_get_depth_type	28
4.6.2.2	hwloc_get_nobjs_by_depth	28

4.6.2.3	hwloc_get_nbobjs_by_type	28
4.6.2.4	hwloc_get_type_depth	28
4.6.2.5	hwloc_topology_get_depth	28
4.6.2.6	hwloc_topology_is_thissystem	28
4.7	Retrieve Objects	30
4.7.1	Function Documentation	30
4.7.1.1	hwloc_get_obj_by_depth	30
4.7.1.2	hwloc_get_obj_by_type	30
4.8	Object/String Conversion	31
4.8.1	Function Documentation	31
4.8.1.1	hwloc_obj_cpuset_sprintf	31
4.8.1.2	hwloc_obj_sprintf	31
4.8.1.3	hwloc_obj_type_of_string	32
4.8.1.4	hwloc_obj_type_string	32
4.9	Binding	33
4.9.1	Detailed Description	33
4.9.2	Enumeration Type Documentation	34
4.9.2.1	hwloc_cpupbind_policy_t	34
4.9.3	Function Documentation	34
4.9.3.1	hwloc_set_cpupbind	34
4.9.3.2	hwloc_set_proc_cpupbind	35
4.9.3.3	hwloc_set_thread_cpupbind	35
4.10	Object Type Helpers	36
4.10.1	Function Documentation	36
4.10.1.1	hwloc_get_type_or_above_depth	36
4.10.1.2	hwloc_get_type_or_below_depth	36
4.11	Basic Traversal Helpers	37
4.11.1	Function Documentation	37
4.11.1.1	hwloc_get_common_ancestor_obj	37
4.11.1.2	hwloc_get_next_child	37
4.11.1.3	hwloc_get_next_obj_by_depth	38

4.11.1.4	hwloc_get_next_obj_by_type	38
4.11.1.5	hwloc_get_system_obj	38
4.11.1.6	hwloc_obj_is_in_subtree	38
4.12	Finding Objects Inside a CPU set	39
4.12.1	Function Documentation	39
4.12.1.1	hwloc_get_largest_objs_inside_cpuset	39
4.12.1.2	hwloc_get_nobjs_inside_cpuset_by_depth	40
4.12.1.3	hwloc_get_nobjs_inside_cpuset_by_type	40
4.12.1.4	hwloc_get_next_obj_inside_cpuset_by_depth	40
4.12.1.5	hwloc_get_next_obj_inside_cpuset_by_type	40
4.12.1.6	hwloc_get_obj_inside_cpuset_by_depth	40
4.12.1.7	hwloc_get_obj_inside_cpuset_by_type	41
4.13	Finding a single Object covering at least CPU set	42
4.13.1	Function Documentation	42
4.13.1.1	hwloc_get_child_covering_cpuset	42
4.13.1.2	hwloc_get_obj_covering_cpuset	42
4.14	Finding a set of similar Objects covering at least a CPU set	43
4.14.1	Function Documentation	43
4.14.1.1	hwloc_get_next_obj_covering_cpuset_by_depth	43
4.14.1.2	hwloc_get_next_obj_covering_cpuset_by_type	43
4.15	Cache-specific Finding Helpers	44
4.15.1	Function Documentation	44
4.15.1.1	hwloc_get_cache_covering_cpuset	44
4.15.1.2	hwloc_get_shared_cache_covering_obj	44
4.16	Advanced Traversal Helpers	45
4.16.1	Function Documentation	45
4.16.1.1	hwloc_get_closest_objs	45
4.17	Binding Helpers	46
4.17.1	Function Documentation	46
4.17.1.1	hwloc_distribute	46
4.18	The Cpuset API	47

4.18.1	Detailed Description	50
4.18.2	Define Documentation	50
4.18.2.1	hwloc_cpuset_foreach_begin	50
4.18.2.2	hwloc_cpuset_foreach_end	50
4.18.3	Typedef Documentation	50
4.18.3.1	hwloc_const_cpuset_t	50
4.18.3.2	hwloc_cpuset_t	50
4.18.4	Function Documentation	51
4.18.4.1	hwloc_cpuset_all_but_cpu	51
4.18.4.2	hwloc_cpuset_alloc	51
4.18.4.3	hwloc_cpuset_andset	51
4.18.4.4	hwloc_cpuset_asprintf	51
4.18.4.5	hwloc_cpuset_clearset	51
4.18.4.6	hwloc_cpuset_clr	51
4.18.4.7	hwloc_cpuset_compar	51
4.18.4.8	hwloc_cpuset_compar_first	52
4.18.4.9	hwloc_cpuset_copy	52
4.18.4.10	hwloc_cpuset_cpu	52
4.18.4.11	hwloc_cpuset_dup	52
4.18.4.12	hwloc_cpuset_fill	52
4.18.4.13	hwloc_cpuset_first	52
4.18.4.14	hwloc_cpuset_free	52
4.18.4.15	hwloc_cpuset_from_ith_ulong	52
4.18.4.16	hwloc_cpuset_from_string	52
4.18.4.17	hwloc_cpuset_from_ulong	53
4.18.4.18	hwloc_cpuset_intersects	53
4.18.4.19	hwloc_cpuset_isequal	53
4.18.4.20	hwloc_cpuset_isfull	53
4.18.4.21	hwloc_cpuset_isincluded	53
4.18.4.22	hwloc_cpuset_isset	53
4.18.4.23	hwloc_cpuset_iszero	53

4.18.4.24	hwloc_cpuset_last	53
4.18.4.25	hwloc_cpuset_orset	53
4.18.4.26	hwloc_cpuset_set	54
4.18.4.27	hwloc_cpuset_set_range	54
4.18.4.28	hwloc_cpuset_singlify	54
4.18.4.29	hwloc_cpuset_sprintf	54
4.18.4.30	hwloc_cpuset_to_ith_ulong	54
4.18.4.31	hwloc_cpuset_to_ulong	54
4.18.4.32	hwloc_cpuset_weight	54
4.18.4.33	hwloc_cpuset_xorset	55
4.18.4.34	hwloc_cpuset_zero	55
4.19	Helpers for manipulating glibc sched affinity	56
4.19.1	Function Documentation	56
4.19.1.1	hwloc_cpuset_from_glibc_sched_affinity	56
4.19.1.2	hwloc_cpuset_to_glibc_sched_affinity	56
4.20	Helpers for manipulating linux kernel cpumap files	57
4.20.1	Function Documentation	57
4.20.1.1	hwloc_linux_parse_cpumap_file	57
4.21	Helpers for manipulating Linux libnuma unsigned long masks	58
4.21.1	Function Documentation	58
4.21.1.1	hwloc_cpuset_from_linux_libnuma_ulongs	58
4.21.1.2	hwloc_cpuset_to_linux_libnuma_ulongs	58
4.22	Helpers for manipulating Linux libnuma bitmask	59
4.22.1	Function Documentation	59
4.22.1.1	hwloc_cpuset_from_linux_libnuma_bitmask	59
4.22.1.2	hwloc_cpuset_to_linux_libnuma_bitmask	59
4.23	Helpers for manipulating Linux libnuma nodemask_t	60
4.23.1	Function Documentation	60
4.23.1.1	hwloc_cpuset_from_linux_libnuma_nodemask	60
4.23.1.2	hwloc_cpuset_to_linux_libnuma_nodemask	60
4.24	OpenFabrics-Specific Functions	61

4.24.1	Function Documentation	61
4.24.1.1	hwloc_ibv_get_device_cpuset	61
5	Data Structure Documentation	63
5.1	hwloc_obj_attr_u::hwloc_cache_attr_s Struct Reference	63
5.1.1	Detailed Description	63
5.1.2	Field Documentation	63
5.1.2.1	depth	63
5.1.2.2	memory_kB	64
5.2	hwloc_obj_attr_u::hwloc_machine_attr_s Struct Reference	65
5.2.1	Detailed Description	65
5.2.2	Field Documentation	65
5.2.2.1	dmi_board_name	65
5.2.2.2	dmi_board_vendor	65
5.2.2.3	huge_page_free	66
5.2.2.4	huge_page_size_kB	66
5.2.2.5	memory_kB	66
5.3	hwloc_obj_attr_u::hwloc_memory_attr_s Struct Reference	67
5.3.1	Detailed Description	67
5.3.2	Field Documentation	67
5.3.2.1	huge_page_free	67
5.3.2.2	memory_kB	67
5.4	hwloc_obj_attr_u::hwloc_misc_attr_s Struct Reference	68
5.4.1	Detailed Description	68
5.4.2	Field Documentation	68
5.4.2.1	depth	68
5.5	hwloc_obj Struct Reference	69
5.5.1	Detailed Description	70
5.5.2	Field Documentation	70
5.5.2.1	arity	70
5.5.2.2	attr	70

5.5.2.3	children	70
5.5.2.4	cpuset	71
5.5.2.5	depth	71
5.5.2.6	father	71
5.5.2.7	first_child	71
5.5.2.8	last_child	71
5.5.2.9	logical_index	71
5.5.2.10	name	71
5.5.2.11	next_cousin	71
5.5.2.12	next_sibling	71
5.5.2.13	os_index	71
5.5.2.14	os_level	72
5.5.2.15	prev_cousin	72
5.5.2.16	prev_sibling	72
5.5.2.17	sibling_rank	72
5.5.2.18	type	72
5.5.2.19	userdata	72
5.6	hwloc_obj_attr_u Union Reference	73
5.6.1	Detailed Description	73
5.6.2	Field Documentation	74
5.6.2.1	cache	74
5.6.2.2	machine	74
5.6.2.3	misc	74
5.6.2.4	node	74
5.6.2.5	system	74

Chapter 1

hwloc

Portable abstraction of hierarchical architectures for high-performance computing

1.1 Introduction

hwloc provides command line tools and a C API to obtain the hierarchical map of key computing elements, such as: NUMA memory nodes, shared caches, processor sockets, processor cores, and processor "threads". hwloc also gathers various attributes such as cache and memory information, and is portable across a variety of different operating systems and platforms.

hwloc primarily aims at helping high-performance computing (HPC) applications, but is also applicable to any project seeking to exploit code and/or data locality on modern computing platforms.

Note that the hwloc project represents the merger of the libtopology project from INRIA and the Portable Linux Processor Affinity (PLPA) sub-project from Open MPI. *Both of these prior projects are now deprecated.* The first hwloc release is essentially a "re-branding" of the libtopology code base, but with both a few genuinely new features and a few PLPA-like features added in. More new features and more PLPA-like features will be added to hwloc over time.

hwloc supports the following operating systems:

- Linux (including old kernels not having sysfs topology information, with knowledge of cpusets, offline cpus, and Kerrighed support)
- Solaris
- AIX

- Darwin / OS X
- OSF/1 (a.k.a., Tru64)
- HP-UX
- Microsoft Windows

hwloc only reports the number of processors on unsupported operating systems; no topology information is available.

For development and debugging purposes, hwloc also offers the ability to work on "fake" topologies:

- Symmetrical tree of resources generated from a list of level arities
- Remote machine simulation through the gathering of Linux sysfs topology files

hwloc can display the topology in a human-readable format, either in graphical mode (X11), or by exporting in one of several different formats, including: plain text, PDF, PNG, and FIG (see Examples below). Note that some of the export formats require additional support libraries.

hwloc offers a programming interface for manipulating topologies and objects. It also brings a powerful CPU bitmap API that is used to describe topology objects location on physical/logical processors. See the [Programming interface](#) below. It may also be used to binding applications onto certain cores or memory nodes. Several utility programs are also provided to ease command-line manipulation of topology objects, binding of processes, and so on.

1.2 Installation

hwloc (<http://www.open-mpi.org/projects/hwloc/>) is available under the BSD license. It is hosted as a sub-project of the overall Open MPI project (<http://www.open-mpi.org/>). Note that hwloc does not require any functionality from Open MPI -- it is a wholly separate (and much smaller!) project and code base. It just happens to be hosted as part of the overall Open MPI project.

Nightly development snapshots are available on the web site. Additionally, the code can be directly checked out of Subversion:

```
shell$ svn checkout http://svn.open-mpi.org/svn/hwloc/trunk hwloc-trunk
shell$ cd hwloc-trunk
shell$ ./autogen.sh
```

Note that GNU Autoconf ≥ 2.60 , Automake ≥ 1.10 and Libtool $\geq 2.2.6$ are required when building from a Subversion checkout.


Installation by itself is the fairly common GNU-based process:

```
shell$ ./configure --prefix=...
shell$ make
shell$ make install
```

The hwloc command-line tool "lstopo" produces human-readable topology maps, as mentioned above. It can also export maps to the "fig" file format. Support for PDF, Postscript, and PNG exporting is provided if the "Cairo" development package can be found when hwloc is configured and build. Similarly, lstopo's XML support requires the libxml2 development package.

1.3 Examples

On a 4-socket 2-core machine with hyperthreading, the lstopo tool may show the following outputs:

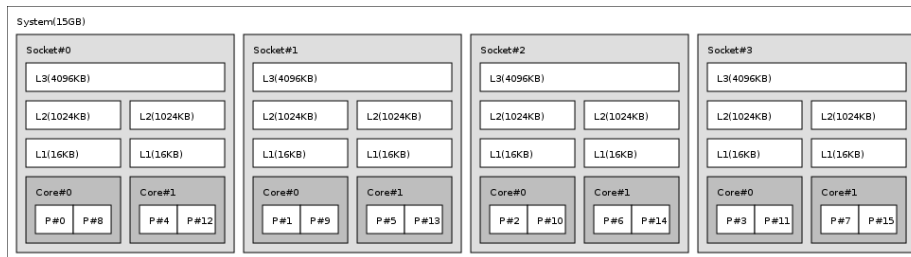


```
System(15GB)
Socket#0 + L3(4096KB)
  L2(1024KB) + L1(16KB) + Core#0
    P#0
    P#8
  L2(1024KB) + L1(16KB) + Core#1
    P#4
    P#12
Socket#1 + L3(4096KB)
  L2(1024KB) + L1(16KB) + Core#0
    P#1
    P#9
  L2(1024KB) + L1(16KB) + Core#1
    P#5
    P#13
Socket#2 + L3(4096KB)
  L2(1024KB) + L1(16KB) + Core#0
    P#2
    P#10
  L2(1024KB) + L1(16KB) + Core#1
    P#6
    P#14
Socket#3 + L3(4096KB)
  L2(1024KB) + L1(16KB) + Core#0
    P#3
    P#7
```

```

P#11
L2 (1024KB) + L1 (16KB) + Core#1
P#7
P#15

```

On a 4-socket 2-core Opteron NUMA machine, the `lstopo` tool may show the following outputs:

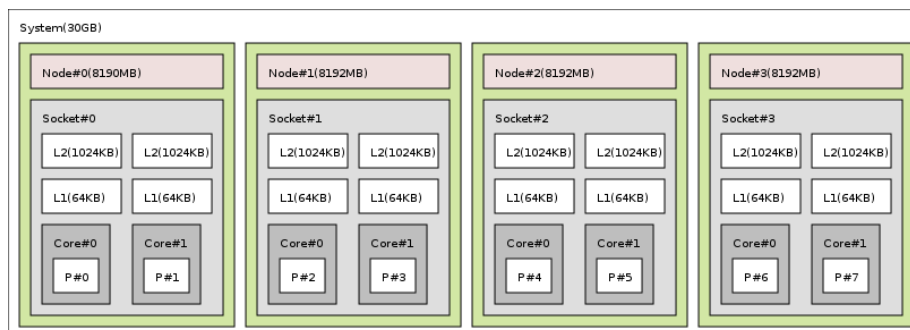


```

System (62GB)
Node#0 (8190MB) + Socket#0
  L2 (1024KB) + L1 (64KB) + Core#0 + P#0
  L2 (1024KB) + L1 (64KB) + Core#1 + P#1
Node#1 (8192MB) + Socket#1
  L2 (1024KB) + L1 (64KB) + Core#0 + P#2
  L2 (1024KB) + L1 (64KB) + Core#1 + P#3
Node#2 (8192MB) + Socket#2
  L2 (1024KB) + L1 (64KB) + Core#0 + P#4
  L2 (1024KB) + L1 (64KB) + Core#1 + P#5
Node#3 (8192MB) + Socket#3
  L2 (1024KB) + L1 (64KB) + Core#0 + P#6
  L2 (1024KB) + L1 (64KB) + Core#1 + P#7
Node#4 (8192MB) + Socket#4
  L2 (1024KB) + L1 (64KB) + Core#0 + P#8
  L2 (1024KB) + L1 (64KB) + Core#1 + P#9
Node#5 (8192MB) + Socket#5
  L2 (1024KB) + L1 (64KB) + Core#0 + P#10
  L2 (1024KB) + L1 (64KB) + Core#1 + P#11
Node#6 (8192MB) + Socket#6
  L2 (1024KB) + L1 (64KB) + Core#0 + P#12
  L2 (1024KB) + L1 (64KB) + Core#1 + P#13
Node#7 (8192MB) + Socket#7
  L2 (1024KB) + L1 (64KB) + Core#0 + P#14
  L2 (1024KB) + L1 (64KB) + Core#1 + P#15

```

On a 2-socket quad-core Xeon (pre-Nehalem, with 2 dual-core dies into each socket):

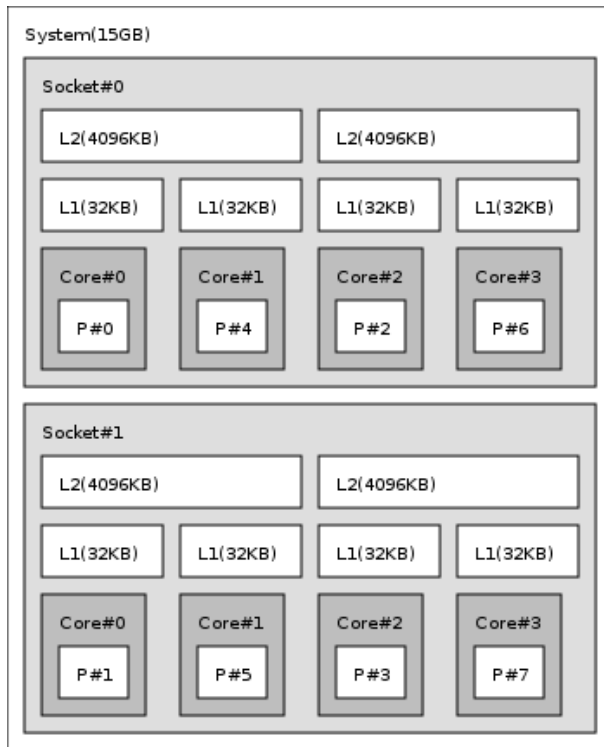

```

System(15GB)
Socket#0
  L2(4096KB)
    L1(32KB) + Core#0 + P#0
    L1(32KB) + Core#1 + P#4
  L2(4096KB)
    L1(32KB) + Core#2 + P#2
    L1(32KB) + Core#3 + P#6
Socket#1
  L2(4096KB)
    L1(32KB) + Core#0 + P#1
    L1(32KB) + Core#1 + P#5
  L2(4096KB)
    L1(32KB) + Core#2 + P#3
    L1(32KB) + Core#3 + P#7

```

1.4 Programming interface

The basic interface is available in [hwloc.h](#). It mostly offers low-level routines for advanced programmers that want to manually manipulate objects and follow links between them. Developers should look at [hwloc/helper.h](#), which provides good higher-level topology traversal examples.

Each object contains a cpuset describing the list of processors that it contains. These cpusets may be used for [Binding](#). hwloc offers an extensive cpuset manipulation interface in [hwloc/cpuset.h](#).

Moreover, hwloc also comes with additional helpers for interoperability with several commonly used environments. For Linux, some specific helpers are available in [hwloc/linux.h](#), and [hwloc/linux-libnuma.h](#) if using libnuma. On glibc-based systems, additional helpers are available in [hwloc/glibc-sched.h](#). For Linux systems with the OpenFabrics verbs library, some dedicated helpers are provided in [hwloc/openfabrics-verbs.h](#) (this helper file is not yet useful on non-Linux systems with the OpenFabrics verbs library).

To precisely define the vocabulary used by hwloc, a [Glossary](#) is available and should probably be read first.

Further documentation is available in a full set of HTML pages, man pages, and self-contained PDF files (formatted for both both US letter and A4 formats) in the source tarball in `doc/doxygen-doc/`. If you are building from a Subversion checkout, you will need to have Doxygen and pdflatex installed -- the documentation will be built during the normal "make" process. The documentation is installed during "make install" to `$prefix/share/doc/hwloc/` and your systems default man page tree (under `$prefix`, of course).

The following section presents an example of API usage.

1.5 API example

The following small C example (named "hwloc-hello.c") prints the topology of the machine and bring the process to the first processor of the second core of the machine.

```
/* Example hwloc API program.
 *
 * Copyright © 2009 INRIA, Université Bordeaux 1
 * Copyright © 2009 Cisco Systems, Inc. All rights reserved.
 *
 * hwloc-hello.c
 */

#include <hwloc.h>

static void print_children(hwloc_topology_t topology, hwloc_obj_t obj,
                          int depth)
{
    char string[128];
    int i;

    hwloc_obj_snprintf(string, sizeof(string), topology, obj, "#", 0);
    printf("%*s%s\n", 2*depth, "", string);
    for (i = 0; i < obj->arity; i++) {
        print_children(topology, obj->children[i], depth + 1);
    }
}
```



```
    }
}

int main(int argc, char **argv)
{
    int depth, i;
    char string[128];
    unsigned int topodepth;
    hwloc_topology_t topology;
    hwloc_cpuset_t cpuset;
    hwloc_obj_t obj;

    /* Allocate and initialize topology object. */
    hwloc_topology_init(&topology);

    /* ... Optionally, put detection configuration here to e.g. ignore
       some objects types, define a synthetic topology, etc....

       The default is to detect all the objects of the machine that
       the caller is allowed to access. See Configure Topology
       Detection. */

    /* Perform the topology detection. */
    hwloc_topology_load(topology);

    /* Optionally, get some additional topology information
       in case we need the topology depth later. */
    topodepth = hwloc_topology_get_depth(topology);

    /* Walk the topology with an array style, from level 0 (always the
       system level) to the lowest level (always the proc level). */
    for (depth = 0; depth < topodepth; depth++) {
        printf("*** Objects at level %d\n", depth);
        for (i = 0; i < hwloc_get_nbobjs_by_depth(topology, depth);
             i++) {
            hwloc_obj_snprintf(string, sizeof(string), topology,
                               hwloc_get_obj_by_depth(topology, depth, i),
                               "#", 0);
            printf("Index %d: %s\n", i, string);
        }
    }

    /* Walk the topology with a tree style. */
    printf("*** Printing overall tree\n");
    print_children(topology, hwloc_get_system_obj(topology), 0);

    /* Print the number of sockets. */
    depth = hwloc_get_type_depth(topology, HWLOC_OBJ_SOCKET);
    if (depth == HWLOC_TYPE_DEPTH_UNKNOWN) {
        printf("*** The number of sockets is unknown\n");
    } else {
        printf("*** %u socket(s)\n",
               hwloc_get_nbobjs_by_depth(topology, depth));
    }

    /* Find out where cores are, or else smaller sets of CPUs if
       the OS doesn't have the notion of a "core". */
}
```

```

depth = hwloc_get_type_or_below_depth(topology, HWLOC_OBJ_CORE);

/* Get last level. */
obj = hwloc_get_obj_by_depth(topology, depth,
                             hwloc_get_nbobjs_by_depth(topology, depth) - 1);
if (obj) {
    /* Get a copy of its cpuset that we may modify. */
    cpuset = hwloc_cpuset_dup(obj->cpuset);

    /* Get only one logical processor (in case the core is
       SMT/hyperthreaded). */
    hwloc_cpuset_singlify(cpuset);

    /* And try to bind ourself there. */
    if (hwloc_set_cpubind(topology, cpuset, 0)) {
        char *str;
        hwloc_cpuset_asprintf(&str, obj->cpuset);
        printf("Couldn't bind to cpuset %s\n", str);
        free(str);
    }

    /* Free our cpuset copy */
    hwloc_cpuset_free(cpuset);
}

/* Destroy topology object. */
hwloc_topology_destroy(topology);

return 0;
}

```

hwloc provides a `pkg-config` executable to obtain relevant compiler and linker flags. For example, it can be used thusly to compile applications that utilize the hwloc library (assuming GNU Make):

```

CFLAGS += $(pkg-config --cflags hwloc)
LDLIBS += $(pkg-config --libs hwloc)
cc hwloc-hello.c $(CFLAGS) -o hwloc-hello $(LDLIBS)

```

On a machine with 4GB of RAM and 2 processor sockets -- each socket of which has two processor cores -- the output from running `hwloc-hello` could be something like the following:

```

shell$ ./hwloc-hello
*** Objects at level 0
Index 0: System(3938MB)
*** Objects at level 1
Index 0: Socket#0
Index 1: Socket#1
*** Objects at level 2
Index 0: Core#0
Index 1: Core#1
Index 2: Core#3
Index 3: Core#2

```

```
*** Objects at level 3
Index 0: P#0
Index 1: P#1
Index 2: P#2
Index 3: P#3
*** Printing overall tree
System(3938MB)
  Socket#0
    Core#0
      P#0
    Core#1
      P#1
  Socket#1
    Core#3
      P#2
    Core#2
      P#3
*** 2 socket(s)
shell$
```

1.6 Questions and bugs

Questions should be sent to the devel mailing list (<http://www.open-mpi.org/community/lists/hwloc.php>). Bug reports should be reported in the tracker (<https://svn.open-mpi.org/trac/hwloc/>).

1.7 History / credits

hwloc is the evolution and merger of the libtopology (<http://runtime.bordeaux.inria.fr/libtopology/>) project and the Portable Linux Processor Affinity (PLPA) (<http://www.open-mpi.org/projects/plpa/>) project. Because of functional and ideological overlap, these two code bases and ideas were merged and released under the name "hwloc" as an Open MPI sub-project.

libtopology was initially developed by the INRIA Runtime Team-Project (<http://runtime.bordeaux.inria.fr/>) (headed by Raymond Namyst (<http://dept-info.labri.fr/~namyst/>)). PLPA was initially developed by the Open MPI development team as a sub-project. Both are now deprecated in favor of hwloc, which is distributed as an Open MPI sub-project.

1.8 Glossary

Object Interesting kind of part of the system, such as a Core, a Cache, a Memory node, etc. The different types detected by hwloc are detailed in the [hwloc_obj_type_t](#) enumeration.

They are topologically sorted by CPU set into a tree whose root is the System object (which always exists).

CPU set The set of logical processors logically included in an object (if any). This term does *not* have any relation to an operating system “CPU set.”

Father object The object logically containing the current object, for example because its CPU set includes the CPU set of the current object.

Children object(s) The object (or objects) contained in the current object because their CPU set is included in the CPU set of the current object.

Arity The number of children of an object.

Sibling objects Objects of the same type which have the same father.

Sibling rank Index to uniquely identify objects of the same type which have the same father, and is always in the range [0, fathers_arity).

Cousin objects Objects of the same type as the current object.


Level Set of objects of the same type.

OS index The index that the operating system (OS) uses to identify the object. This may be completely arbitrary, or it may depend on the BIOS configuration.

Depth Nesting level in the object tree, starting from the 0th object (i.e., the System object).

Logical index Index to uniquely identify objects of the same type. It is generally used to express proximity. This index is always linear and in the range [0, num_objs_same_type_same_level). Think of it as “cousin rank.”

The following diagram can help to understand the vocabulary of the relationships by showing the example of a machine with two dual core sockets (with no hardware threads); thus, a topology with 4 levels.

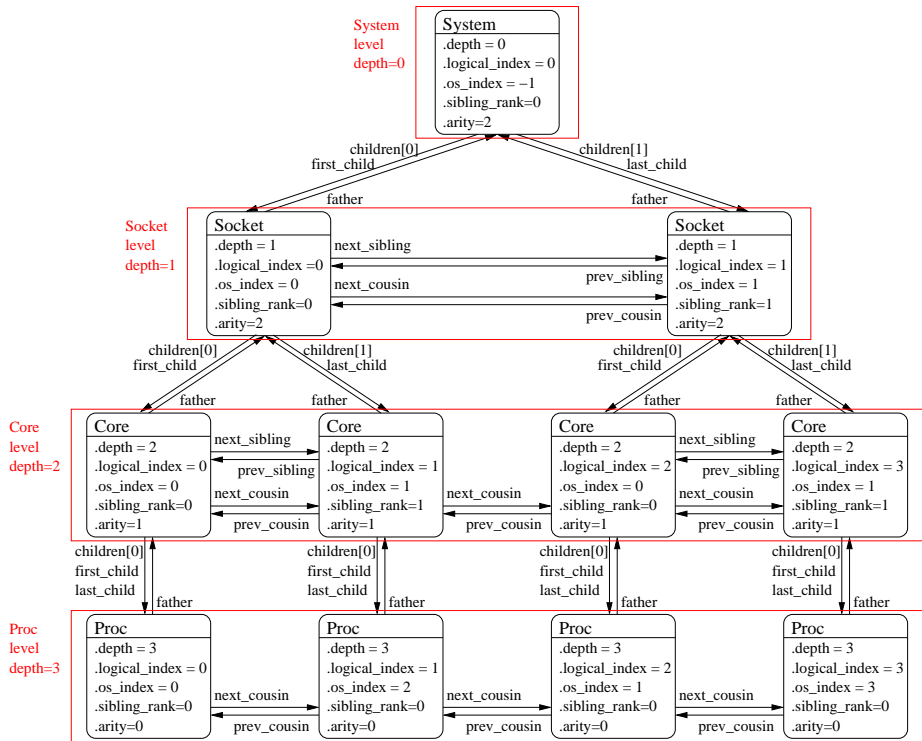

It should be noted that for Processor objects, the logical index -- as computed linearly by hwloc -- is not the same as the OS index.

Chapter 2

Module Index

2.1 Modules

Here is a list of all modules:

Topology context	17
Topology Object Types	18
Topology Objects	20
Create and Destroy Topologies	21
Configure Topology Detection	23
Get some Topology Information	27
Retrieve Objects	30
Object/String Conversion	31
Binding	33
Object Type Helpers	36
Basic Traversal Helpers	37
Finding Objects Inside a CPU set	39
Finding a single Object covering at least CPU set	42
Finding a set of similar Objects covering at least a CPU set	43
Cache-specific Finding Helpers	44
Advanced Traversal Helpers	45
Binding Helpers	46
The Cpuset API	47
Helpers for manipulating glibc sched affinity	56
Helpers for manipulating linux kernel cpumap files	57
Helpers for manipulating Linux libnuma unsigned long masks	58
Helpers for manipulating Linux libnuma bitmask	59
Helpers for manipulating Linux libnuma nodemask_t	60
OpenFabrics-Specific Functions	61

Chapter 3

Data Structure Index

3.1 Data Structures

Here are the data structures with brief descriptions:

- [hwloc_obj_attr_u::hwloc_cache_attr_s](#) (Cache-specific Object Attributes) . . . 63
- [hwloc_obj_attr_u::hwloc_machine_attr_s](#) (Machine-specific Object Attributes) 65
- [hwloc_obj_attr_u::hwloc_memory_attr_s](#) (Node-specific Object Attributes) . . . 67
- [hwloc_obj_attr_u::hwloc_misc_attr_s](#) (Misc-specific Object Attributes) . . . 68
- [hwloc_obj](#) (Structure of a topology object) 69
- [hwloc_obj_attr_u](#) (Object type-specific Attributes) 73

Chapter 4

Module Documentation

4.1 Topology context

Typedefs

- typedef struct hwloc_topology * [hwloc_topology_t](#)
Topology context.

4.1.1 Typedef Documentation

4.1.1.1 typedef struct hwloc_topology* hwloc_topology_t

Topology context. To be initialized with [hwloc_topology_init\(\)](#) and built with [hwloc_topology_load\(\)](#).

4.2 Topology Object Types

Defines

- #define `HWLOC_TYPE_UNORDERED` `INT_MAX`
Value returned by `hwloc_compare_types` when types can not be compared.

Enumerations

- enum `hwloc_obj_type_t` {
 `HWLOC_OBJ_SYSTEM`, `HWLOC_OBJ_MACHINE`, `HWLOC_OBJ_NODE`,
 `HWLOC_OBJ_SOCKET`,
 `HWLOC_OBJ_CACHE`, `HWLOC_OBJ_CORE`, `HWLOC_OBJ_PROC`,
 `HWLOC_OBJ_MISC` }
Type of topology object.

Functions

- int `hwloc_compare_types` (`hwloc_obj_type_t` type1, `hwloc_obj_type_t` type2)
Compare the depth of two object types.

4.2.1 Define Documentation

4.2.1.1 #define `HWLOC_TYPE_UNORDERED` `INT_MAX`

Value returned by `hwloc_compare_types` when types can not be compared.

4.2.2 Enumeration Type Documentation

4.2.2.1 enum `hwloc_obj_type_t`

Type of topology object.

Note:

Do not rely on the ordering or completeness of the values as new ones may be defined in the future! If you need to compare types, use `hwloc_compare_types()` instead.

Enumerator:

HWLOC_OBJ_SYSTEM Whole system (may be a cluster of machines). The whole system that is accessible to hwloc. That may comprise several machines in SSI systems like Kerrighed.

HWLOC_OBJ_MACHINE Machine. A set of processors and memory with cache coherency.

HWLOC_OBJ_NODE NUMA node. A set of processors around memory which the processors can directly access.

HWLOC_OBJ_SOCKET Socket, physical package, or chip. In the physical meaning, i.e. that you can add or remove physically.

HWLOC_OBJ_CACHE Data cache. Can be L1, L2, L3, ...

HWLOC_OBJ_CORE Core. A computation unit (may be shared by several logical processors).

HWLOC_OBJ_PROC (Logical) Processor. An execution unit (may share a core with some other logical processors, e.g. in the case of an SMT core). Objects of this kind are always reported and can thus be used as fallback when others are not.

HWLOC_OBJ_MISC Miscellaneous objects. Objects which do not fit in the above but are detected by hwloc and are useful to take into account for affinity. For instance, some OSes expose their arbitrary processors aggregation this way.

4.2.3 Function Documentation

4.2.3.1 `int hwloc_compare_types(hwloc_obj_type_t type1, hwloc_obj_type_t type2)`

Compare the depth of two object types. Types shouldn't be compared as they are, since newer ones may be added in the future. This function returns less than, equal to, or greater than zero if `type1` is considered to be respectively higher than, equal to, or deeper than `type2` in the hierarchy. If the types can not be compared (because it does not make sense), `HWLOC_TYPE_UNORDERED` is returned. Object types containing CPUs can always be compared.

Note:

`HWLOC_OBJ_SYSTEM` will always be the highest, and `HWLOC_OBJ_PROC` will always be the deepest.

4.3 Topology Objects

Data Structures

- struct [hwloc_obj](#)
Structure of a topology object.
- union [hwloc_obj_attr_u](#)
Object type-specific Attributes.

Typedefs

- typedef struct [hwloc_obj](#) * [hwloc_obj_t](#)

4.3.1 Typedef Documentation

4.3.1.1 typedef struct [hwloc_obj](#)* [hwloc_obj_t](#)

4.4 Create and Destroy Topologies

Functions

- int `hwloc_topology_init` (`hwloc_topology_t *topologyp`)
Allocate a topology context.
- int `hwloc_topology_load` (`hwloc_topology_t topology`)
Build the actual topology.
- void `hwloc_topology_destroy` (`hwloc_topology_t topology`)
Terminate and free a topology context.
- void `hwloc_topology_check` (`hwloc_topology_t topology`)
Run internal checks on a topology structure.

4.4.1 Function Documentation

4.4.1.1 void `hwloc_topology_check` (`hwloc_topology_t topology`)

Run internal checks on a topology structure.

Parameters:

topology is the topology to be checked

4.4.1.2 void `hwloc_topology_destroy` (`hwloc_topology_t topology`)

Terminate and free a topology context.

Parameters:

topology is the topology to be freed

4.4.1.3 int `hwloc_topology_init` (`hwloc_topology_t * topologyp`)

Allocate a topology context.

Parameters:

→ *topologyp* is assigned a pointer to the new allocated context.

Returns:

0 on success, -1 on error.

4.4.1.4 int hwloc_topology_load (hwloc_topology_t *topology*)

Build the actual topology. Build the actual topology once initialized with [hwloc_topology_init\(\)](#) and tuned with `hwlocality_configuration` routine. No other routine may be called earlier using this topology context.

Parameters:

topology is the topology to be loaded with objects.

Returns:

0 on success, -1 on error.

See also:

[Configure Topology Detection](#)

4.5 Configure Topology Detection

Enumerations

- enum `hwloc_topology_flags_e` { `HWLOC_TOPOLOGY_FLAG_WHOLE_SYSTEM` = (1<<0), `HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM` = (1<<1) }

Flags to be set onto a topology context before load.

Functions

- int `hwloc_topology_ignore_type` (`hwloc_topology_t` topology, `hwloc_obj_type_t` type)
Ignore an object type.
- int `hwloc_topology_ignore_type_keep_structure` (`hwloc_topology_t` topology, `hwloc_obj_type_t` type)
Ignore an object type if it does not bring any structure.
- int `hwloc_topology_ignore_all_keep_structure` (`hwloc_topology_t` topology)
Ignore all objects that do not bring any structure.
- int `hwloc_topology_set_flags` (`hwloc_topology_t` topology, unsigned long flags)
Set OR'ed flags to non-yet-loaded topology.
- int `hwloc_topology_set_fsroot` (`hwloc_topology_t` restrict topology, const char *restrict fsroot_path)
Change the file-system root path when building the topology from sysfs/procfs.
- int `hwloc_topology_set_synthetic` (`hwloc_topology_t` restrict topology, const char *restrict description)
Enable synthetic topology.
- int `hwloc_topology_set_xml` (`hwloc_topology_t` restrict topology, const char *restrict xmlpath)
Enable XML-file based topology.

4.5.1 Detailed Description

These functions can optionally be called between `hwloc_topology_init()` and `hwloc_topology_load()` to configure how the detection should be performed, e.g. to ignore some objects types, define a synthetic topology, etc.

If none of them is called, the default is to detect all the objects of the machine that the caller is allowed to access.

This default behavior may also be modified through environment variables if the application did not modify it already. Setting `HWLOC_XMLFILE` in the environment enforces the discovery from a XML file as if `hwloc_topology_set_xml()` had been called. `HWLOC_FSROOT` switches to reading the topology from the specified Linux filesystem root as if `hwloc_topology_set_fsroot()` had been called. Finally, `HWLOC_THISSYSTEM` enforces the value of the `is_thissystem` field.

4.5.2 Enumeration Type Documentation

4.5.2.1 enum `hwloc_topology_flags_e`

Flags to be set onto a topology context before load. Flags should be given to `hwloc_topology_set_flags()`.

Enumerator:

HWLOC_TOPOLOGY_FLAG_WHOLE_SYSTEM
HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM

4.5.3 Function Documentation

4.5.3.1 int `hwloc_topology_ignore_all_keep_structure` (`hwloc_topology_t topology`)

Ignore all objects that do not bring any structure. Ignore all objects that do not bring any structure: Each ignored object should have a single children or be the only child of its father.

4.5.3.2 int `hwloc_topology_ignore_type` (`hwloc_topology_t topology`, `hwloc_obj_type_t type`)

Ignore an object type. Ignore all objects from the given type. The top-level type `HWLOC_OBJ_SYSTEM` and bottom-level type `HWLOC_OBJ_PROC` may not be ignored.

4.5.3.3 `int hwloc_topology_ignore_type_keep_structure (hwloc_topology_t topology, hwloc_obj_type_t type)`

Ignore an object type if it does not bring any structure. Ignore all objects from the given type as long as they do not bring any structure: Each ignored object should have a single children or be the only child of its father. The top-level type `HWLOC_OBJ_SYSTEM` and bottom-level type `HWLOC_OBJ_PROC` may not be ignored.

4.5.3.4 `int hwloc_topology_set_flags (hwloc_topology_t topology, unsigned long flags)`

Set OR'ed flags to non-yet-loaded topology. Set a OR'ed set of `hwloc_topology_flags_e` onto a topology that was not yet loaded.

4.5.3.5 `int hwloc_topology_set_fsroot (hwloc_topology_t restrict topology, const char *restrict fsroot_path)`

Change the file-system root path when building the topology from `sysfs/procfs`. On Linux system, use `sysfs` and `procfs` files as if they were mounted on the given `fsroot_path` instead of the main file-system root. Setting the environment variable `HWLOC_FSROOT` may also result in this behavior. Not using the main file-system root causes `hwloc_topology_is_thissystem` field to return 0.

Note:

For conveniency, this backend provides empty binding hooks which just return success. To have `hwloc` still actually call OS-specific hooks, the `HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM` has to be set to assert that the loaded file is really the underlying system.

4.5.3.6 `int hwloc_topology_set_synthetic (hwloc_topology_t restrict topology, const char *restrict description)`

Enable synthetic topology. Gather topology information from the given `description` which should be a comma separated string of numbers describing the arity of each level. Each number may be prefixed with a type and a colon to enforce the type of a level.

Note:

For conveniency, this backend provides empty binding hooks which just return success.

4.5.3.7 `int hwloc_topology_set_xml (hwloc_topology_t restrict topology, const char *restrict xmlpath)`

Enable XML-file based topology. Gather topology information the XML file given at `xmlpath`. Setting the environment variable `HWLOC_XMLFILE` may also result in this behavior. This file may have been generated earlier with `lstopo file.xml`.

Note:

For conveniency, this backend provides empty binding hooks which just return success. To have `hwloc` still actually call OS-specific hooks, the `HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM` has to be set to assert that the loaded file is really the underlying system.

4.6 Get some Topology Information

Defines

- #define `HWLOC_TYPE_DEPTH_UNKNOWN` -1
No object of given type exists in the topology.
- #define `HWLOC_TYPE_DEPTH_MULTIPLE` -2
Objects of given type exist at different depth in the topology.

Functions

- unsigned `hwloc_topology_get_depth` (`hwloc_topology_t` restrict topology)
Get the depth of the hierarchical tree of objects.
- int `hwloc_get_type_depth` (`hwloc_topology_t` topology, `hwloc_obj_type_t` type)
Returns the depth of objects of type `type`.
- `hwloc_obj_type_t` `hwloc_get_depth_type` (`hwloc_topology_t` topology, unsigned depth)
Returns the type of objects at depth `depth`.
- unsigned `hwloc_get_nobjs_by_depth` (`hwloc_topology_t` topology, unsigned depth)
Returns the width of level at depth `depth`.
- static inline int `hwloc_get_nobjs_by_type` (`hwloc_topology_t` topology, `hwloc_obj_type_t` type)
Returns the width of level type `type`.
- int `hwloc_topology_is_thissystem` (`hwloc_topology_t` restrict topology)
Does the topology context come from this system?

4.6.1 Define Documentation

4.6.1.1 #define `HWLOC_TYPE_DEPTH_MULTIPLE` -2

Objects of given type exist at different depth in the topology.

4.6.1.2 #define HWLOC_TYPE_DEPTH_UNKNOWN -1

No object of given type exists in the topology.

4.6.2 Function Documentation

4.6.2.1 hwloc_obj_type_t hwloc_get_depth_type (hwloc_topology_t *topology*, unsigned *depth*)

Returns the type of objects at depth *depth*.

4.6.2.2 unsigned hwloc_get_nobjs_by_depth (hwloc_topology_t *topology*, unsigned *depth*)

Returns the width of level at depth *depth*.

4.6.2.3 static inline int hwloc_get_nobjs_by_type (hwloc_topology_t *topology*, hwloc_obj_type_t *type*) [static]

Returns the width of level type *type*. If no object for that type exists, 0 is returned. If there are several levels with objects of that type, -1 is returned.

4.6.2.4 int hwloc_get_type_depth (hwloc_topology_t *topology*, hwloc_obj_type_t *type*)

Returns the depth of objects of type *type*. If no object of this type is present on the underlying architecture, or if the OS doesn't provide this kind of information, the function returns HWLOC_TYPE_DEPTH_UNKNOWN.

If *type* is absent but a similar type is acceptable, see also [hwloc_get_type_or_below_depth\(\)](#) and [hwloc_get_type_or_above_depth\(\)](#).

4.6.2.5 unsigned hwloc_topology_get_depth (hwloc_topology_t *restrict topology*)

Get the depth of the hierarchical tree of objects. This is the depth of HWLOC_OBJ_-PROC objects plus one.

4.6.2.6 int hwloc_topology_is_thissystem (hwloc_topology_t *restrict topology*)

Does the topology context come from this system?

Returns:

1 if this topology context was built using the system running this program.
0 instead (for instance if using another file-system root, a XML topology file, or a synthetic topology).

4.7 Retrieve Objects

Functions

- [hwloc_obj_t hwloc_get_obj_by_depth](#) ([hwloc_topology_t](#) topology, unsigned depth, unsigned idx)

Returns the topology object at index `index` from depth `depth`.

- static inline [hwloc_obj_t hwloc_get_obj_by_type](#) ([hwloc_topology_t](#) topology, [hwloc_obj_type_t](#) type, unsigned idx)

Returns the topology object at index `index` with type `type`.

4.7.1 Function Documentation

4.7.1.1 [hwloc_obj_t hwloc_get_obj_by_depth](#) ([hwloc_topology_t](#) topology, unsigned depth, unsigned idx)

Returns the topology object at index `index` from depth `depth`.

4.7.1.2 static inline [hwloc_obj_t hwloc_get_obj_by_type](#) ([hwloc_topology_t](#) topology, [hwloc_obj_type_t](#) type, unsigned idx) **[static]**

Returns the topology object at index `index` with type `type`. If no object for that type exists, `NULL` is returned. If there are several levels with objects of that type, `NULL` is returned and the caller may fallback to [hwloc_get_obj_by_depth\(\)](#).

4.8 Object/String Conversion

Functions

- `const char * hwloc_obj_type_string (hwloc_obj_type_t type)`
Return a stringified topology object type.
- `hwloc_obj_type_t hwloc_obj_type_of_string (const char *string)`
Return an object type from the string.
- `int hwloc_obj_snprintf (char *restrict string, size_t size, hwloc_topology_t topology, hwloc_obj_t obj, const char *restrict indexprefix, int verbose)`
Stringify a given topology object into a human-readable form.
- `int hwloc_obj_cpuset_snprintf (char *restrict str, size_t size, size_t nobj, const hwloc_obj_t *restrict objs)`
Stringify the cpuset containing a set of objects.

4.8.1 Function Documentation

4.8.1.1 `int hwloc_obj_cpuset_snprintf (char *restrict str, size_t size, size_t nobj, const hwloc_obj_t *restrict objs)`

Stringify the cpuset containing a set of objects.

Returns:

how many characters were actually written (not including the ending `\0`).

4.8.1.2 `int hwloc_obj_snprintf (char *restrict string, size_t size, hwloc_topology_t topology, hwloc_obj_t obj, const char *restrict indexprefix, int verbose)`

Stringify a given topology object into a human-readable form. Fill string `string` up to `size` characters with the description of topology object `obj` in topology `topology`.

If `verbose` is set, a longer description is used. Otherwise a short description is used.

`indexprefix` is used to prefix the `os_index` attribute number of the object in the description. If `NULL`, the `#` character is used.

Returns:

how many characters were actually written (not including the ending `\0`).

4.8.1.3 hwloc_obj_type_t hwloc_obj_type_of_string (const char * *string*)

Return an object type from the string.

4.8.1.4 const char* hwloc_obj_type_string (hwloc_obj_type_t *type*)

Return a stringified topology object type.

4.9 Binding

Enumerations

- enum `hwloc_cpubind_policy_t` { `HWLOC_CPUBIND_PROCESS` = (1<<0), `HWLOC_CPUBIND_THREAD` = (1<<1), `HWLOC_CPUBIND_STRICT` = (1<<2) }

Process/Thread binding policy.

Functions

- int `hwloc_set_cpubind` (`hwloc_topology_t` topology, const `hwloc_cpuset_t` set, int policy)
Bind current process or thread on cpus given in cpuset set.
- int `hwloc_set_proc_cpubind` (`hwloc_topology_t` topology, `hwloc_pid_t` pid, const `hwloc_cpuset_t` set, int policy)
Bind a process pid on cpus given in cpuset set.
- int `hwloc_set_thread_cpubind` (`hwloc_topology_t` topology, `hwloc_thread_t` tid, const `hwloc_cpuset_t` set, int policy)
Bind a thread tid on cpus given in cpuset set.

4.9.1 Detailed Description

It is often useful to call `hwloc_cpuset_singlify()` first so that a single CPU remains in the set. This way, the process will not even migrate between different CPUs. Some OSes also only support that kind of binding.

Note:

Some OSes do not provide all ways to bind processes, threads, etc and the corresponding binding functions may fail. `ENOSYS` is returned when it is not possible to bind the requested kind of object processes/threads). `EXDEV` is returned when the requested cpuset can not be enforced (e.g. some systems only allow one CPU, and some other systems only allow one NUMA node)

The most portable version that should be preferred over the others, whenever possible, is

```
hwloc_set_cpubind(topology, set, 0),
```

as it just binds the current program, assuming it is monothread, or

```
hwloc_set_cpubind(topology, set, HWLOC_CPUBIND_THREAD),
```

which binds the current thread of the current program (which may be multithreaded).

Note:

To unbind, just call the binding function with either a full cpuset or a cpuset equal to the system cpuset.

4.9.2 Enumeration Type Documentation

4.9.2.1 enum hwloc_cpubind_policy_t

Process/Thread binding policy. These flags can be used to refine the binding policy.

The default (0) is to bind the current process, assumed to be mono-thread, in a non-strict way. This is the most portable way to bind as all OSes usually provide it.

Enumerator:

HWLOC_CPUBIND_PROCESS Bind all threads of the current multithreaded process. This may not be supported by some OSes (e.g. Linux).

HWLOC_CPUBIND_THREAD Bind current thread of current process.

HWLOC_CPUBIND_STRICT Request for strict binding from the OS. By default, when the designated CPUs are all busy while other CPUs are idle, OSes may execute the thread/process on those other CPUs instead of the designated CPUs, to let them progress anyway. Strict binding means that the thread/process will *never* execute on other cpus than the designated CPUs, even when those are busy with other tasks and other CPUs are idle.

Note:

Depending on OSes and implementations, strict binding may not be possible (implementation reason) or not allowed (administrative reasons), and the function will fail in that case.

4.9.3 Function Documentation

4.9.3.1 int hwloc_set_cpubind (hwloc_topology_t topology, const hwloc_cpuset_t set, int policy)

Bind current process or thread on cpus given in cpuset *set*.

4.9.3.2 `int hwloc_set_proc_cpubind (hwloc_topology_t topology, hwloc_pid_t pid, const hwloc_cpuset_t set, int policy)`

Bind a process `pid` on cpus given in cpuset `set`.

Note:

`hwloc_pid_t` is `pid_t` on unix platforms, and `HANDLE` on native Windows platforms

`HWLOC_CPUBIND_THREAD` can not be used in `policy`.

4.9.3.3 `int hwloc_set_thread_cpubind (hwloc_topology_t topology, hwloc_thread_t tid, const hwloc_cpuset_t set, int policy)`

Bind a thread `tid` on cpus given in cpuset `set`.

Note:

`hwloc_thread_t` is `pthread_t` on unix platforms, and `HANDLE` on native Windows platforms

`HWLOC_CPUBIND_PROCESS` can not be used in `policy`.

4.10 Object Type Helpers

Functions

- static inline unsigned `hwloc_get_type_or_below_depth` (`hwloc_topology_t topology`, `hwloc_obj_type_t type`)
Returns the depth of objects of type `type` or below.
- static inline unsigned `hwloc_get_type_or_above_depth` (`hwloc_topology_t topology`, `hwloc_obj_type_t type`)
Returns the depth of objects of type `type` or above.

4.10.1 Function Documentation

4.10.1.1 static inline unsigned `hwloc_get_type_or_above_depth` (`hwloc_topology_t topology`, `hwloc_obj_type_t type`) [`static`]

Returns the depth of objects of type `type` or above. If no object of this type is present on the underlying architecture, the function returns the depth of the first "present" object typically containing `type`.

4.10.1.2 static inline unsigned `hwloc_get_type_or_below_depth` (`hwloc_topology_t topology`, `hwloc_obj_type_t type`) [`static`]

Returns the depth of objects of type `type` or below. If no object of this type is present on the underlying architecture, the function returns the depth of the first "present" object typically found inside `type`.

4.11 Basic Traversal Helpers

Functions

- static inline `hwloc_obj_t hwloc_get_system_obj (hwloc_topology_t topology)`
Returns the top-object of the topology-tree. Its type is `HWLOC_OBJ_SYSTEM`.
- static inline `hwloc_obj_t hwloc_get_next_obj_by_depth (hwloc_topology_t topology, unsigned depth, hwloc_obj_t prev)`
Returns the next object at depth `depth`.
- static inline `hwloc_obj_t hwloc_get_next_obj_by_type (hwloc_topology_t topology, hwloc_obj_type_t type, hwloc_obj_t prev)`
Returns the next object of type `type`.
- static inline `hwloc_obj_t hwloc_get_next_child (hwloc_topology_t topology, hwloc_obj_t father, hwloc_obj_t prev)`
Return the next child.
- static inline `hwloc_obj_t hwloc_get_common_ancestor_obj (hwloc_topology_t topology, hwloc_obj_t obj1, hwloc_obj_t obj2)`
Returns the common father object to objects `lvl1` and `lvl2`.
- static inline `int hwloc_obj_is_in_subtree (hwloc_topology_t topology, hwloc_obj_t obj, hwloc_obj_t subtree_root)`
Returns true if `_obj_` is inside the subtree beginning with `subtree_root`.

4.11.1 Function Documentation

4.11.1.1 static inline `hwloc_obj_t hwloc_get_common_ancestor_obj (hwloc_topology_t topology, hwloc_obj_t obj1, hwloc_obj_t obj2)` [static]

Returns the common father object to objects `lvl1` and `lvl2`.

4.11.1.2 static inline `hwloc_obj_t hwloc_get_next_child (hwloc_topology_t topology, hwloc_obj_t father, hwloc_obj_t prev)` [static]

Return the next child. If `prev` is `NULL`, return the first child.

4.11.1.3 `static inline hwloc_obj_t hwloc_get_next_obj_by_depth`
(`hwloc_topology_t topology`, unsigned `depth`, `hwloc_obj_t prev`)
[`static`]

Returns the next object at depth `depth`. If `prev` is `NULL`, return the first object at depth `depth`.

4.11.1.4 `static inline hwloc_obj_t hwloc_get_next_obj_by_type`
(`hwloc_topology_t topology`, `hwloc_obj_type_t type`, `hwloc_obj_t prev`)
[`static`]

Returns the next object of type `type`. If `prev` is `NULL`, return the first object at type `type`. If there are multiple or no depth for given type, return `NULL` and let the caller fallback to `hwloc_get_next_obj_by_depth()`.

4.11.1.5 `static inline hwloc_obj_t hwloc_get_system_obj` (`hwloc_topology_t topology`) [`static`]

Returns the top-object of the topology-tree. Its type is `HWLOC_OBJ_SYSTEM`.

4.11.1.6 `static inline int hwloc_obj_is_in_subtree` (`hwloc_topology_t topology`,
`hwloc_obj_t obj`, `hwloc_obj_t subtree_root`) [`static`]

Returns true if `_obj_` is inside the subtree beginning with `subtree_root`.

4.12 Finding Objects Inside a CPU set

Functions

- `int hwloc_get_largest_objs_inside_cpuset (hwloc_topology_t topology, hwloc_cpuset_t set, hwloc_obj_t *restrict objs, int max)`

Get the set of largest objects covering exactly a given cpuset set.

- `static inline hwloc_obj_t hwloc_get_next_obj_inside_cpuset_by_depth (hwloc_topology_t topology, hwloc_cpuset_t set, unsigned depth, hwloc_obj_t prev)`

Return the next object at depth depth included in CPU set set.

- `static inline hwloc_obj_t hwloc_get_next_obj_inside_cpuset_by_type (hwloc_topology_t topology, hwloc_cpuset_t set, hwloc_obj_type_t type, hwloc_obj_t prev)`

Return the next object of type type included in CPU set set.

- `static inline hwloc_obj_t hwloc_get_obj_inside_cpuset_by_depth (hwloc_topology_t topology, hwloc_cpuset_t set, unsigned depth, unsigned idx)`

Return the index-th object at depth depth included in CPU set set.

- `static inline hwloc_obj_t hwloc_get_obj_inside_cpuset_by_type (hwloc_topology_t topology, hwloc_cpuset_t set, hwloc_obj_type_t type, unsigned idx)`

Return the idx-th object of type type included in CPU set set.

- `static inline unsigned hwloc_get_nbobjs_inside_cpuset_by_depth (hwloc_topology_t topology, hwloc_cpuset_t set, unsigned depth)`

Return the number of objects at depth depth included in CPU set set.

- `static inline int hwloc_get_nbobjs_inside_cpuset_by_type (hwloc_topology_t topology, hwloc_cpuset_t set, hwloc_obj_type_t type)`

Return the number of objects of type type included in CPU set set.

4.12.1 Function Documentation

4.12.1.1 `int hwloc_get_largest_objs_inside_cpuset (hwloc_topology_t topology, hwloc_cpuset_t set, hwloc_obj_t *restrict objs, int max)`

Get the set of largest objects covering exactly a given cpuset set.

Returns:

the number of objects returned in `objs`.

4.12.1.2 `static inline unsigned hwloc_get_nbobjs_inside_cpuset_by_depth`
(`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `unsigned depth`)
[`static`]

Return the number of objects at depth `depth` included in CPU set `set`.

4.12.1.3 `static inline int hwloc_get_nbobjs_inside_cpuset_by_type`
(`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `hwloc_obj_type_t`
`type`) [`static`]

Return the number of objects of type `type` included in CPU set `set`. If no object for that type exists inside CPU set `set`, 0 is returned. If there are several levels with objects of that type inside CPU set `set`, -1 is returned.

4.12.1.4 `static inline hwloc_obj_t hwloc_get_next_obj_inside_cpuset_by_depth`
(`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `unsigned depth`,
`hwloc_obj_t prev`) [`static`]

Return the next object at depth `depth` included in CPU set `set`. If `prev` is `NULL`, return the first object at depth `depth` included in `set`. The next invocation should pass the previous return value in `prev` so as to obtain the next object in `set`.

4.12.1.5 `static inline hwloc_obj_t hwloc_get_next_obj_inside_cpuset_by_type`
(`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `hwloc_obj_type_t`
`type`, `hwloc_obj_t prev`) [`static`]

Return the next object of type `type` included in CPU set `set`. If there are multiple or no depth for given type, return `NULL` and let the caller fallback to [hwloc_get_next_obj_inside_cpuset_by_depth\(\)](#).

4.12.1.6 `static inline hwloc_obj_t hwloc_get_obj_inside_cpuset_by_depth`
(`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `unsigned depth`,
`unsigned idx`) [`static`]

Return the `index`-th object at depth `depth` included in CPU set `set`.

4.12.1.7 `static inline hwloc_obj_t hwloc_get_obj_inside_cpuset_by_type`
(`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `hwloc_obj_type_t`
`type`, unsigned `idx`) [`static`]

Return the `idx`-th object of type `type` included in CPU set `set`. If there are multiple or no depth for given type, return `NULL` and let the caller fallback to [hwloc_get_obj_inside_cpuset_by_depth\(\)](#).

4.13 Finding a single Object covering at least CPU set

Functions

- static inline `hwloc_obj_t hwloc_get_child_covering_cpuset` (`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `hwloc_obj_t father`)

Get the child covering at least CPU set `set`.

- static inline `hwloc_obj_t hwloc_get_obj_covering_cpuset` (`hwloc_topology_t topology`, `hwloc_cpuset_t set`)

Get the lowest object covering at least CPU set `set`.

4.13.1 Function Documentation

4.13.1.1 `static inline hwloc_obj_t hwloc_get_child_covering_cpuset`
(`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `hwloc_obj_t father`)
[`static`]

Get the child covering at least CPU set `set`.

Returns:

NULL if no child matches.

4.13.1.2 `static inline hwloc_obj_t hwloc_get_obj_covering_cpuset`
(`hwloc_topology_t topology`, `hwloc_cpuset_t set`) [`static`]

Get the lowest object covering at least CPU set `set`.

Returns:

NULL if no object matches.

4.14 Finding a set of similar Objects covering at least a CPU set

Functions

- static inline `hwloc_obj_t hwloc_get_next_obj_covering_cpuset_by_depth` (`hwloc_topology_t topology`, `hwloc_cpuset_t set`, unsigned `depth`, `hwloc_obj_t prev`)

Iterate through same-depth objects covering at least CPU set `set`.

- static inline `hwloc_obj_t hwloc_get_next_obj_covering_cpuset_by_type` (`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `hwloc_obj_type_t type`, `hwloc_obj_t prev`)

Iterate through same-type objects covering at least CPU set `set`.

4.14.1 Function Documentation

4.14.1.1 static inline `hwloc_obj_t hwloc_get_next_obj_covering_cpuset_by_depth` (`hwloc_topology_t topology`, `hwloc_cpuset_t set`, unsigned `depth`, `hwloc_obj_t prev`) [**static**]

Iterate through same-depth objects covering at least CPU set `set`. If object `prev` is `NULL`, return the first object at depth `depth` covering at least part of CPU set `set`. The next invocation should pass the previous return value in `prev` so as to obtain the next object covering at least another part of `set`.

4.14.1.2 static inline `hwloc_obj_t hwloc_get_next_obj_covering_cpuset_by_type` (`hwloc_topology_t topology`, `hwloc_cpuset_t set`, `hwloc_obj_type_t type`, `hwloc_obj_t prev`) [**static**]

Iterate through same-type objects covering at least CPU set `set`. If object `prev` is `NULL`, return the first object of type `type` covering at least part of CPU set `set`. The next invocation should pass the previous return value in `prev` so as to obtain the next object of type `type` covering at least another part of `set`.

If there are no or multiple depths for type `type`, `NULL` is returned. The caller may fallback to `hwloc_get_next_obj_covering_cpuset_by_depth()` for each depth.

4.15 Cache-specific Finding Helpers

Functions

- static inline `hwloc_obj_t hwloc_get_cache_covering_cpuset` (`hwloc_topology_t topology`, `hwloc_cpuset_t set`)

Get the first cache covering a cpuset `set`.

- static inline `hwloc_obj_t hwloc_get_shared_cache_covering_obj` (`hwloc_topology_t topology`, `hwloc_obj_t obj`)

Get the first cache shared between an object and somebody else.

4.15.1 Function Documentation

4.15.1.1 static inline `hwloc_obj_t hwloc_get_cache_covering_cpuset` (`hwloc_topology_t topology`, `hwloc_cpuset_t set`) [`static`]

Get the first cache covering a cpuset `set`.

Returns:

NULL if no cache matches

4.15.1.2 static inline `hwloc_obj_t hwloc_get_shared_cache_covering_obj` (`hwloc_topology_t topology`, `hwloc_obj_t obj`) [`static`]

Get the first cache shared between an object and somebody else.

Returns:

NULL if no cache matches

4.16 Advanced Traversal Helpers

Functions

- int `hwloc_get_closest_objs` (`hwloc_topology_t` topology, `hwloc_obj_t` src, `hwloc_obj_t` *restrict objs, int max)

Do a depth-first traversal of the topology to find and sort.

4.16.1 Function Documentation

4.16.1.1 int `hwloc_get_closest_objs` (`hwloc_topology_t` topology, `hwloc_obj_t` src, `hwloc_obj_t` *restrict objs, int max)

Do a depth-first traversal of the topology to find and sort. all objects that are at the same depth than `src`. Report in `objs` up to `max` physically closest ones to `src`.

Returns:

the number of objects returned in `objs`.

4.17 Binding Helpers

Functions

- static inline void `hwloc_distribute` (`hwloc_topology_t` topology, `hwloc_obj_t` root, `hwloc_cpuset_t` *cpuset, int n)

Distribute n items over the topology under root.

4.17.1 Function Documentation

4.17.1.1 static inline void `hwloc_distribute` (`hwloc_topology_t` topology, `hwloc_obj_t` root, `hwloc_cpuset_t` *cpuset, int n) [static]

Distribute n items over the topology under root. Array cpuset will be filled with n cpusets distributed linearly over the topology under root .

This is typically useful when an application wants to distribute n threads over a machine, giving each of them as much private cache as possible and keeping them locally in number order.

The caller may typically want to additionally call `hwloc_cpuset_singlify()` before binding a thread, so that it doesn't move at all.

4.18 The Cpuset API

Defines

- #define `hwloc_cpuset_foreach_begin(cpu, set)`
Loop macro iterating on CPU set `set`.
- #define `hwloc_cpuset_foreach_end()` }
End of loop.

Typedefs

- typedef struct `hwloc_cpuset_s` * `hwloc_cpuset_t`
Set of CPUs represented as an opaque pointer to an internal bitmask.
- typedef struct `hwloc_cpuset_s` * `hwloc_const_cpuset_t`

Functions

- `hwloc_cpuset_t hwloc_cpuset_alloc` (void)
Allocate a new empty CPU set.
- void `hwloc_cpuset_free` (`hwloc_cpuset_t` set)
Free CPU set `set`.
- `hwloc_cpuset_t hwloc_cpuset_dup` (`hwloc_cpuset_t` set)
Duplicate CPU set `set` by allocating a new CPU set and copying its contents.
- void `hwloc_cpuset_copy` (`hwloc_cpuset_t` dst, `hwloc_cpuset_t` src)
Copy the contents of CPU set `src` into the already allocated CPU set `dst`.
- int `hwloc_cpuset_snprintf` (char *restrict buf, size_t buflen, `hwloc_const_cpuset_t` set)
Stringify a cpuset.
- int `hwloc_cpuset_asprintf` (char **strp, `hwloc_const_cpuset_t` set)
Stringify a cpuset into a newly allocated string.
- `hwloc_cpuset_t hwloc_cpuset_from_string` (const char *restrict string)
Parse a cpuset string.

- void `hwloc_cpuset_zero` (`hwloc_cpuset_t` set)
Primitives & macros for building, modifying and consulting "sets" of cpus.
- void `hwloc_cpuset_fill` (`hwloc_cpuset_t` set)
Fill CPU set set.
- void `hwloc_cpuset_from_ulong` (`hwloc_cpuset_t` set, unsigned long mask)
Setup CPU set set from unsigned long mask.
- void `hwloc_cpuset_from_ith_ulong` (`hwloc_cpuset_t` set, int i, unsigned long mask)
Setup CPU set set from unsigned long mask used as i -th subset.
- unsigned long `hwloc_cpuset_to_ulong` (`hwloc_const_cpuset_t` set)
Convert the beginning part of CPU set set into unsigned long mask.
- unsigned long `hwloc_cpuset_to_ith_ulong` (`hwloc_const_cpuset_t` set, int i)
Convert the i -th subset of CPU set set into unsigned long mask.
- void `hwloc_cpuset_cpu` (`hwloc_cpuset_t` set, unsigned cpu)
Clear CPU set set and set CPU cpu.
- void `hwloc_cpuset_all_but_cpu` (`hwloc_cpuset_t` set, unsigned cpu)
Clear CPU set set and set all but the CPU cpu.
- void `hwloc_cpuset_set` (`hwloc_cpuset_t` set, unsigned cpu)
Add CPU cpu in CPU set set.
- void `hwloc_cpuset_set_range` (`hwloc_cpuset_t` set, unsigned begincpu, unsigned endcpu)
Add CPUs from begincpu to endcpu in CPU set set.
- void `hwloc_cpuset_clr` (`hwloc_cpuset_t` set, unsigned cpu)
Remove CPU cpu from CPU set set.
- int `hwloc_cpuset_isset` (`hwloc_const_cpuset_t` set, unsigned cpu)
Test whether CPU cpu is part of set set.
- int `hwloc_cpuset_iszero` (`hwloc_const_cpuset_t` set)
Test whether set set is zero.
- int `hwloc_cpuset_isfull` (`hwloc_const_cpuset_t` set)
Test whether set set is full.

- int `hwloc_cpuset_isequal` (`hwloc_const_cpuset_t` set1, `hwloc_const_cpuset_t` set2)
Test whether set set1 is equal to set set2.
- int `hwloc_cpuset_intersects` (`hwloc_const_cpuset_t` set1, `hwloc_const_cpuset_t` set2)
Test whether sets set1 and set2 intersects.
- int `hwloc_cpuset_isincluded` (`hwloc_const_cpuset_t` sub_set, `hwloc_const_cpuset_t` super_set)
Test whether set sub_set is part of set super_set.
- void `hwloc_cpuset_orset` (`hwloc_cpuset_t` set, `hwloc_const_cpuset_t` modifier_set)
Or set modifier_set into set set.
- void `hwloc_cpuset_andset` (`hwloc_cpuset_t` set, `hwloc_const_cpuset_t` modifier_set)
And set modifier_set into set set.
- void `hwloc_cpuset_clearset` (`hwloc_cpuset_t` set, `hwloc_const_cpuset_t` modifier_set)
Clear set modifier_set out of set set.
- void `hwloc_cpuset_xorset` (`hwloc_cpuset_t` set, `hwloc_const_cpuset_t` modifier_set)
Xor set set with set modifier_set.
- int `hwloc_cpuset_first` (`hwloc_const_cpuset_t` set)
Compute the first CPU (least significant bit) in CPU set set.
- int `hwloc_cpuset_last` (`hwloc_const_cpuset_t` set)
Compute the last CPU (most significant bit) in CPU set set.
- void `hwloc_cpuset_singlify` (`hwloc_cpuset_t` set)
Keep a single CPU among those set in CPU set set.
- int `hwloc_cpuset_compar_first` (`hwloc_const_cpuset_t` set1, `hwloc_const_cpuset_t` set2)
Compar CPU sets set1 and set2 using their first set bit.

- int [hwloc_cpuset_compar](#) ([hwloc_const_cpuset_t](#) set1, [hwloc_const_cpuset_t](#) set2)
Compar CPU sets `set1` and `set2` using their last bits.
- int [hwloc_cpuset_weight](#) ([hwloc_const_cpuset_t](#) set)
Compute the weight of CPU set `set`.

4.18.1 Detailed Description

For use in hwloc itself, a `hwloc_cpuset_t` represents a set of logical processors.

Note:

cpusets are indexed by OS logical processor number.

4.18.2 Define Documentation

4.18.2.1 #define hwloc_cpuset_foreach_begin(cpu, set)

Value:

```
for (cpu = 0; cpu < HWLOC_NBMAXCPUS; cpu++) \
    if (hwloc_cpuset_isset(set, cpu)) {
```

Loop macro iterating on CPU set `set`. It yields on each `cpu` that is member of the set. It uses variables `set` (the cpu set) and `cpu` (the loop variable)

4.18.2.2 #define hwloc_cpuset_foreach_end() }

End of loop.

See also:

[hwloc_cpuset_foreach_begin](#)

4.18.3 Typedef Documentation

4.18.3.1 typedef struct hwloc_cpuset_s* hwloc_const_cpuset_t

4.18.3.2 typedef struct hwloc_cpuset_s* hwloc_cpuset_t

Set of CPUs represented as an opaque pointer to an internal bitmask.

4.18.4 Function Documentation

4.18.4.1 void hwloc_cpuset_all_but_cpu (hwloc_cpuset_t set, unsigned cpu)

Clear CPU set *set* and set all but the CPU *cpu*.

4.18.4.2 hwloc_cpuset_t hwloc_cpuset_alloc (void)

Allocate a new empty CPU set.

4.18.4.3 void hwloc_cpuset_andset (hwloc_cpuset_t set, hwloc_const_cpuset_t modifier_set)

And set *modifier_set* into set *set*.

4.18.4.4 int hwloc_cpuset_asprintf (char ** strp, hwloc_const_cpuset_t set)

Stringify a cpuset into a newly allocated string.

Returns:

the number of character that were actually written (not including the ending `\0`).

4.18.4.5 void hwloc_cpuset_clearset (hwloc_cpuset_t set, hwloc_const_cpuset_t modifier_set)

Clear set *modifier_set* out of set *set*.

4.18.4.6 void hwloc_cpuset_clr (hwloc_cpuset_t set, unsigned cpu)

Remove CPU *cpu* from CPU set *set*.

4.18.4.7 int hwloc_cpuset_compar (hwloc_const_cpuset_t set1, hwloc_const_cpuset_t set2)

Compar CPU sets *set1* and *set2* using their last bits. Higher most significant bit is higher. The empty CPU set is considered lower than anything.

4.18.4.8 `int hwloc_cpuset_compar_first (hwloc_const_cpuset_t set1,
hwloc_const_cpuset_t set2)`

Compar CPU sets `set1` and `set2` using their first set bit. Smaller least significant bit is smaller. The empty CPU set is considered higher than anything.

4.18.4.9 `void hwloc_cpuset_copy (hwloc_cpuset_t dst, hwloc_cpuset_t src)`

Copy the contents of CPU set `src` into the already allocated CPU set `dst`.

4.18.4.10 `void hwloc_cpuset_cpu (hwloc_cpuset_t set, unsigned cpu)`

Clear CPU set `set` and set CPU `cpu`.

4.18.4.11 `hwloc_cpuset_t hwloc_cpuset_dup (hwloc_cpuset_t set)`

Duplicate CPU set `set` by allocating a new CPU set and copying its contents.

4.18.4.12 `void hwloc_cpuset_fill (hwloc_cpuset_t set)`

Fill CPU set `set`.

4.18.4.13 `int hwloc_cpuset_first (hwloc_const_cpuset_t set)`

Compute the first CPU (least significant bit) in CPU set `set`.

4.18.4.14 `void hwloc_cpuset_free (hwloc_cpuset_t set)`

Free CPU set `set`.

4.18.4.15 `void hwloc_cpuset_from_ith_ulong (hwloc_cpuset_t set, int i,
unsigned long mask)`

Setup CPU set `set` from unsigned long `mask` used as `i`-th subset.

4.18.4.16 `hwloc_cpuset_t hwloc_cpuset_from_string (const char *restrict
string)`

Parse a cpuset string. Must start and end with a digit.

4.18.4.17 void `hwloc_cpuset_from_ulong` (`hwloc_cpuset_t set`, unsigned long *mask*)

Setup CPU set `set` from unsigned long `mask`.

4.18.4.18 int `hwloc_cpuset_intersects` (`hwloc_const_cpuset_t set1`, `hwloc_const_cpuset_t set2`)

Test whether sets `set1` and `set2` intersects.

4.18.4.19 int `hwloc_cpuset_isequal` (`hwloc_const_cpuset_t set1`, `hwloc_const_cpuset_t set2`)

Test whether set `set1` is equal to set `set2`.

4.18.4.20 int `hwloc_cpuset_isfull` (`hwloc_const_cpuset_t set`)

Test whether set `set` is full.

4.18.4.21 int `hwloc_cpuset_isincluded` (`hwloc_const_cpuset_t sub_set`, `hwloc_const_cpuset_t super_set`)

Test whether set `sub_set` is part of set `super_set`.

4.18.4.22 int `hwloc_cpuset_isset` (`hwloc_const_cpuset_t set`, unsigned *cpu*)

Test whether CPU `cpu` is part of set `set`.

4.18.4.23 int `hwloc_cpuset_iszero` (`hwloc_const_cpuset_t set`)

Test whether set `set` is zero.

4.18.4.24 int `hwloc_cpuset_last` (`hwloc_const_cpuset_t set`)

Compute the last CPU (most significant bit) in CPU set `set`.

4.18.4.25 void `hwloc_cpuset_orset` (`hwloc_cpuset_t set`, `hwloc_const_cpuset_t modifier_set`)

Or set `modifier_set` into set `set`.

4.18.4.26 void hwloc_cpuset_set (hwloc_cpuset_t set, unsigned cpu)

Add CPU `cpu` in CPU set `set`.

4.18.4.27 void hwloc_cpuset_set_range (hwloc_cpuset_t set, unsigned begincpu, unsigned endcpu)

Add CPUs from `begincpu` to `endcpu` in CPU set `set`.

4.18.4.28 void hwloc_cpuset_singlify (hwloc_cpuset_t set)

Keep a single CPU among those set in CPU set `set`. Might be used before binding so that the process does not have a chance of migrating between multiple logical CPUs in the original mask.

4.18.4.29 int hwloc_cpuset_snprintf (char *restrict buf, size_t buflen, hwloc_const_cpuset_t set)

Stringify a cpuset. Up to `buflen` characters may be written in buffer `buf`.

Returns:

the number of character that were actually written if not truncating, or that would have been written (not including the ending `\0`).

4.18.4.30 unsigned long hwloc_cpuset_to_ith_ulong (hwloc_const_cpuset_t set, int i)

Convert the `i`-th subset of CPU set `set` into unsigned long mask.

4.18.4.31 unsigned long hwloc_cpuset_to_ulong (hwloc_const_cpuset_t set)

Convert the beginning part of CPU set `set` into unsigned long mask.

4.18.4.32 int hwloc_cpuset_weight (hwloc_const_cpuset_t set)

Compute the weight of CPU set `set`.

4.18.4.33 void hwloc_cpuset_xorset (hwloc_cpuset_t *set*, hwloc_const_cpuset_t *modifier_set*)

Xor set *set* with set *modifier_set*.

4.18.4.34 void hwloc_cpuset_zero (hwloc_cpuset_t *set*)

Primitives & macros for building, modifying and consulting "sets" of cpus. Empty CPU set *set*

4.19 Helpers for manipulating glibc sched affinity

Functions

- static inline void `hwloc_cpuset_to_glibc_sched_affinity` (`hwloc_topology_t topology`, `hwloc_cpuset_t hwlocset`, `cpu_set_t *schedset`, `size_t schedsetsize`)
Convert hwloc CPU set toposet into glibc sched affinity CPU set schedset.
- static inline `hwloc_cpuset_t hwloc_cpuset_from_glibc_sched_affinity` (`hwloc_topology_t topology`, `const cpu_set_t *schedset`, `size_t schedsetsize`)
Convert glibc sched affinity CPU set schedset into hwloc CPU set.

4.19.1 Function Documentation

4.19.1.1 static inline `hwloc_cpuset_t hwloc_cpuset_from_glibc_sched_affinity` (`hwloc_topology_t topology`, `const cpu_set_t * schedset`, `size_t schedsetsize`) [**static**]

Convert glibc sched affinity CPU set `schedset` into hwloc CPU set. This function may be used before calling `sched_setaffinity` or any other function that takes a `cpu_set_t` as input parameter.

`schedsetsize` should be `sizeof(cpu_set_t)` unless `schedset` was dynamically allocated with `CPU_ALLOC`

4.19.1.2 static inline void `hwloc_cpuset_to_glibc_sched_affinity` (`hwloc_topology_t topology`, `hwloc_cpuset_t hwlocset`, `cpu_set_t * schedset`, `size_t schedsetsize`) [**static**]

Convert hwloc CPU set `toposet` into glibc sched affinity CPU set `schedset`. This function may be used before calling `sched_setaffinity` or any other function that takes a `cpu_set_t` as input parameter.

`schedsetsize` should be `sizeof(cpu_set_t)` unless `schedset` was dynamically allocated with `CPU_ALLOC`

4.20 Helpers for manipulating linux kernel cpumap files

Functions

- [hwloc_cpuset_t hwloc_linux_parse_cpumap_file](#) (FILE *file)
Convert a linux kernel cpumap file `file` into hwloc CPU set.

4.20.1 Function Documentation

4.20.1.1 [hwloc_cpuset_t hwloc_linux_parse_cpumap_file](#) (FILE *file)

Convert a linux kernel cpumap file `file` into hwloc CPU set. Might be used when reading CPU set from sysfs attributes such as topology and caches for processors, or `local_cpus` for devices.

4.21 Helpers for manipulating Linux libnuma unsigned long masks

Functions

- static inline void `hwloc_cpuset_to_linux_libnuma_ulongs` (`hwloc_topology_t` topology, `hwloc_cpuset_t` cpuset, unsigned long *mask, unsigned long *maxnode)

Convert hwloc CPU set cpuset into the array of unsigned long mask.

- static inline `hwloc_cpuset_t` `hwloc_cpuset_from_linux_libnuma_ulongs` (`hwloc_topology_t` topology, const unsigned long *mask, unsigned long maxnode)

Convert the array of unsigned long mask into hwloc CPU set.

4.21.1 Function Documentation

4.21.1.1 static inline `hwloc_cpuset_t` `hwloc_cpuset_from_linux_libnuma_ulongs` (`hwloc_topology_t` topology, const unsigned long * mask, unsigned long maxnode) [static]

Convert the array of unsigned long mask into hwloc CPU set. mask is a array of unsigned long that will be read. maxnode contains the maximal node number that may be read in mask.

This function may be used after calling `get_mempolicy` or any other function that takes an array of unsigned long as output parameter (and possibly a maximal node number as input parameter).

4.21.1.2 static inline void `hwloc_cpuset_to_linux_libnuma_ulongs` (`hwloc_topology_t` topology, `hwloc_cpuset_t` cpuset, unsigned long * mask, unsigned long * maxnode) [static]

Convert hwloc CPU set cpuset into the array of unsigned long mask. mask is the array of unsigned long that will be filled. maxnode contains the maximal node number that may be stored in mask. maxnode will be set to the maximal node number that was found, plus one.

This function may be used before calling `set_mempolicy`, `mbind`, `migrate_pages` or any other function that takes an array of unsigned long and a maximal node number as input parameter.

4.22 Helpers for manipulating Linux libnuma bitmask

Functions

- static inline struct bitmask * `hwloc_cpuset_to_linux_libnuma_bitmask` (`hwloc_topology_t topology`, `hwloc_cpuset_t cpuset`)
Convert hwloc CPU set `cpuset` into the returned libnuma bitmask.
- static inline `hwloc_cpuset_t hwloc_cpuset_from_linux_libnuma_bitmask` (`hwloc_topology_t topology`, const struct bitmask *`bitmask`)
Convert libnuma bitmask `bitmask` into hwloc CPU set `cpuset`.

4.22.1 Function Documentation

4.22.1.1 static inline `hwloc_cpuset_t hwloc_cpuset_from_linux_libnuma_bitmask` (`hwloc_topology_t topology`, const struct bitmask * `bitmask`) [static]

Convert libnuma bitmask `bitmask` into hwloc CPU set `cpuset`. This function may be used after calling many `numa_` functions that use a struct bitmask as an output parameter.

4.22.1.2 static inline struct bitmask* `hwloc_cpuset_to_linux_libnuma_bitmask` (`hwloc_topology_t topology`, `hwloc_cpuset_t cpuset`) [static, read]

Convert hwloc CPU set `cpuset` into the returned libnuma bitmask. The returned bitmask should later be freed with `numa_bitmask_free`.

This function may be used before calling many `numa_` functions that use a struct bitmask as an input parameter.

4.23 Helpers for manipulating Linux libnuma nodemask_t

Functions

- static inline void `hwloc_cpuset_to_linux_libnuma_nodemask` (`hwloc_topology_t topology`, `hwloc_cpuset_t cpuset`, `nodemask_t *nodemask`)
Convert hwloc CPU set cpuset into libnuma nodemask nodemask.
- static inline `hwloc_cpuset_t hwloc_cpuset_from_linux_libnuma_nodemask` (`hwloc_topology_t topology`, `const nodemask_t *nodemask`)
Convert libnuma nodemask nodemask into hwloc CPU set cpuset.

4.23.1 Function Documentation

4.23.1.1 static inline hwloc_cpuset_t hwloc_cpuset_from_linux_libnuma_nodemask (`hwloc_topology_t topology`, `const nodemask_t *nodemask`) [**static**]

Convert libnuma nodemask `nodemask` into hwloc CPU set `cpuset`. This function may be used before calling some old libnuma functions that use a `nodemask_t` as an output parameter.

4.23.1.2 static inline void hwloc_cpuset_to_linux_libnuma_nodemask (`hwloc_topology_t topology`, `hwloc_cpuset_t cpuset`, `nodemask_t *nodemask`) [**static**]

Convert hwloc CPU set `cpuset` into libnuma nodemask `nodemask`. This function may be used before calling some old libnuma functions that use a `nodemask_t` as an input parameter.

4.24 OpenFabrics-Specific Functions

Functions

- static inline `hwloc_cpuset_t hwloc_ibv_get_device_cpuset` (struct `ibv_device *ibdev`)

Get the CPU set of logical processors that are physically close to device `ibdev`.

4.24.1 Function Documentation

4.24.1.1 static inline `hwloc_cpuset_t hwloc_ibv_get_device_cpuset` (struct `ibv_device *ibdev`) [`static`]

Get the CPU set of logical processors that are physically close to device `ibdev`. For the given OpenFabrics device `ibdev`, read the corresponding kernel-provided cpumap file and return the corresponding CPU set. This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

Chapter 5

Data Structure Documentation

5.1 hwloc_obj_attr_u::hwloc_cache_attr_s Struct Reference

Cache-specific Object Attributes.

```
#include <hwloc.h>
```

Data Fields

- unsigned long `memory_kB`
Size of cache.
- unsigned `depth`
Depth of cache.

5.1.1 Detailed Description

Cache-specific Object Attributes.

5.1.2 Field Documentation

5.1.2.1 unsigned hwloc_obj_attr_u::hwloc_cache_attr_s::depth

Depth of cache.

5.1.2.2 unsigned long hwloc_obj_attr_u::hwloc_cache_attr_s::memory_kB

Size of cache.

The documentation for this struct was generated from the following file:

- hwloc.h

5.2 hwloc_obj_attr_u::hwloc_machine_attr_s Struct Reference

Machine-specific Object Attributes.

```
#include <hwloc.h>
```

Data Fields

- char * [dmi_board_vendor](#)
DMI board vendor name.
- char * [dmi_board_name](#)
DMI board model name.
- unsigned long [memory_kB](#)
Size of memory node.
- unsigned long [huge_page_free](#)
Number of available huge pages.
- unsigned long [huge_page_size_kB](#)
Size of huge pages.

5.2.1 Detailed Description

Machine-specific Object Attributes.

5.2.2 Field Documentation

5.2.2.1 char* hwloc_obj_attr_u::hwloc_machine_attr_s::dmi_board_name

DMI board model name.

5.2.2.2 char* hwloc_obj_attr_u::hwloc_machine_attr_s::dmi_board_vendor

DMI board vendor name.

5.2.2.3 unsigned long hwloc_obj_attr_u::hwloc_machine_attr_s::huge_page_free

Number of available huge pages.

5.2.2.4 unsigned long hwloc_obj_attr_u::hwloc_machine_attr_s::huge_page_size_kB

Size of huge pages.

5.2.2.5 unsigned long hwloc_obj_attr_u::hwloc_machine_attr_s::memory_kB

Size of memory node.

The documentation for this struct was generated from the following file:

- hwloc.h

5.3 hwloc_obj_attr_u::hwloc_memory_attr_s Struct Reference

Node-specific Object Attributes.

```
#include <hwloc.h>
```

Data Fields

- unsigned long [memory_kB](#)
Size of memory node.
- unsigned long [huge_page_free](#)
Number of available huge pages.

5.3.1 Detailed Description

Node-specific Object Attributes.

5.3.2 Field Documentation

5.3.2.1 unsigned long hwloc_obj_attr_u::hwloc_memory_attr_s::huge_page_free

Number of available huge pages.

5.3.2.2 unsigned long hwloc_obj_attr_u::hwloc_memory_attr_s::memory_kB

Size of memory node.

The documentation for this struct was generated from the following file:

- hwloc.h

5.4 hwloc_obj_attr_u::hwloc_misc_attr_s Struct Reference

Misc-specific Object Attributes.

```
#include <hwloc.h>
```

Data Fields

- unsigned [depth](#)
Depth of misc object.

5.4.1 Detailed Description

Misc-specific Object Attributes.

5.4.2 Field Documentation

5.4.2.1 unsigned hwloc_obj_attr_u::hwloc_misc_attr_s::depth

Depth of misc object.

The documentation for this struct was generated from the following file:

- hwloc.h

5.5 hwloc_obj Struct Reference

Structure of a topology object.

```
#include <hwloc.h>
```

Data Fields

- [hwloc_obj_type_t](#) type
Type of object.
- signed [os_index](#)
OS-provided physical index number.
- char * [name](#)
Object description if any.
- union [hwloc_obj_attr_u](#) * [attr](#)
Object type-specific Attributes.
- unsigned [depth](#)
Vertical index in the hierarchy.
- unsigned [logical_index](#)
Horizontal index in the whole list of similar objects, could be a "cousin_rank" since it's the rank within the "cousin" list below.
- struct [hwloc_obj](#) * [next_cousin](#)
Next object of same type.
- struct [hwloc_obj](#) * [prev_cousin](#)
Previous object of same type.
- struct [hwloc_obj](#) * [father](#)
Father, NULL if root (system object).
- unsigned [sibling_rank](#)
Index in father's children[] array.
- struct [hwloc_obj](#) * [next_sibling](#)
Next object below the same father.
- struct [hwloc_obj](#) * [prev_sibling](#)

Previous object below the same father.

- unsigned `arity`
Number of children.
- struct `hwloc_obj ** children`
Children, `children[0 .. arity -1]`.
- struct `hwloc_obj * first_child`
First child.
- struct `hwloc_obj * last_child`
Last child.
- void * `userdata`
Application-given private data pointer, initialized to `NULL`, use it as you wish.
- `hwloc_cpuset_t cpuset`
CPUs covered by this object.
- signed `os_level`
OS-provided physical level.

5.5.1 Detailed Description

Structure of a topology object. Applications mustn't modify any field except `userdata`.

5.5.2 Field Documentation

5.5.2.1 unsigned `hwloc_obj::arity`

Number of children.

5.5.2.2 union `hwloc_obj_attr_u* hwloc_obj::attr` **[write]**

Object type-specific Attributes.

5.5.2.3 struct `hwloc_obj** hwloc_obj::children` **[read]**

Children, `children[0 .. arity -1]`.

5.5.2.4 hwloc_cpuset_t hwloc_obj::cpuset

CPUs covered by this object.

5.5.2.5 unsigned hwloc_obj::depth

Vertical index in the hierarchy.

5.5.2.6 struct hwloc_obj* hwloc_obj::father [read]

Father, NULL if root (system object).

5.5.2.7 struct hwloc_obj* hwloc_obj::first_child [read]

First child.

5.5.2.8 struct hwloc_obj* hwloc_obj::last_child [read]

Last child.

5.5.2.9 unsigned hwloc_obj::logical_index

Horizontal index in the whole list of similar objects, could be a "cousin_rank" since it's the rank within the "cousin" list below.

5.5.2.10 char* hwloc_obj::name

Object description if any.

5.5.2.11 struct hwloc_obj* hwloc_obj::next_cousin [read]

Next object of same type.

5.5.2.12 struct hwloc_obj* hwloc_obj::next_sibling [read]

Next object below the same father.

5.5.2.13 signed hwloc_obj::os_index

OS-provided physical index number.

5.5.2.14 signed hwloc_obj::os_level

OS-provided physical level.

5.5.2.15 struct hwloc_obj* hwloc_obj::prev_cousin [read]

Previous object of same type.

5.5.2.16 struct hwloc_obj* hwloc_obj::prev_sibling [read]

Previous object below the same father.

5.5.2.17 unsigned hwloc_obj::sibling_rank

Index in father's `children[]` array.

5.5.2.18 hwloc_obj_type_t hwloc_obj::type

Type of object.

5.5.2.19 void* hwloc_obj::userdata

Application-given private data pointer, initialized to `NULL`, use it as you wish.

The documentation for this struct was generated from the following file:

- `hwloc.h`

5.6 hwloc_obj_attr_u Union Reference

Object type-specific Attributes.

```
#include <hwloc.h>
```

Data Structures

- struct [hwloc_cache_attr_s](#)
Cache-specific Object Attributes.
- struct [hwloc_machine_attr_s](#)
Machine-specific Object Attributes.
- struct [hwloc_memory_attr_s](#)
Node-specific Object Attributes.
- struct [hwloc_misc_attr_s](#)
Misc-specific Object Attributes.

Data Fields

- struct [hwloc_obj_attr_u::hwloc_cache_attr_s](#) cache
Cache-specific Object Attributes.
- struct [hwloc_obj_attr_u::hwloc_memory_attr_s](#) node
Node-specific Object Attributes.
- struct [hwloc_obj_attr_u::hwloc_machine_attr_s](#) machine
Machine-specific Object Attributes.
- struct [hwloc_machine_attr_s](#) system
System-specific Object Attributes.
- struct [hwloc_obj_attr_u::hwloc_misc_attr_s](#) misc
Misc-specific Object Attributes.

5.6.1 Detailed Description

Object type-specific Attributes.

5.6.2 Field Documentation

5.6.2.1 struct hwloc_obj_attr_u::hwloc_cache_attr_s hwloc_obj_attr_u::cache

Cache-specific Object Attributes.

5.6.2.2 struct hwloc_obj_attr_u::hwloc_machine_attr_s hwloc_obj_attr_u::machine

Machine-specific Object Attributes.

5.6.2.3 struct hwloc_obj_attr_u::hwloc_misc_attr_s hwloc_obj_attr_u::misc

Misc-specific Object Attributes.

5.6.2.4 struct hwloc_obj_attr_u::hwloc_memory_attr_s hwloc_obj_attr_u::node

Node-specific Object Attributes.

5.6.2.5 struct hwloc_machine_attr_s hwloc_obj_attr_u::system [read]

System-specific Object Attributes.

The documentation for this union was generated from the following file:

- hwloc.h

Index

- Advanced Traversal Helpers, [45](#)
- arity
 - hwloc_obj, [70](#)
- attr
 - hwloc_obj, [70](#)
- Basic Traversal Helpers, [37](#)
- Binding, [33](#)
- Binding Helpers, [46](#)
- cache
 - hwloc_obj_attr_u, [74](#)
- Cache-specific Finding Helpers, [44](#)
- children
 - hwloc_obj, [70](#)
- Configure Topology Detection, [23](#)
- cpuset
 - hwloc_obj, [70](#)
- Create and Destroy Topologies, [21](#)
- depth
 - hwloc_obj, [71](#)
 - hwloc_obj_attr_u::hwloc_cache_attr_s, [63](#)
 - hwloc_obj_attr_u::hwloc_misc_attr_s, [68](#)
- dmi_board_name
 - hwloc_obj_attr_u::hwloc_machine_attr_s, [65](#)
- dmi_board_vendor
 - hwloc_obj_attr_u::hwloc_machine_attr_s, [65](#)
- father
 - hwloc_obj, [71](#)
- Finding a set of similar Objects covering at least a CPU set, [43](#)
- Finding a single Object covering at least CPU set, [42](#)
- Finding Objects Inside a CPU set, [39](#)
- first_child
 - hwloc_obj, [71](#)
- Get some Topology Information, [27](#)
- Helpers for manipulating glibc sched affinity, [56](#)
- Helpers for manipulating linux kernel cpumap files, [57](#)
- Helpers for manipulating Linux libnuma bitmask, [59](#)
- Helpers for manipulating Linux libnuma nodemask_t, [60](#)
- Helpers for manipulating Linux libnuma unsigned long masks, [58](#)
- huge_page_free
 - hwloc_obj_attr_u::hwloc_machine_attr_s, [65](#)
 - hwloc_obj_attr_u::hwloc_memory_attr_s, [67](#)
- huge_page_size_kB
 - hwloc_obj_attr_u::hwloc_machine_attr_s, [66](#)
- HWLOC_CPUBIND_PROCESS
 - hwlocality_binding, [34](#)
- HWLOC_CPUBIND_STRICT
 - hwlocality_binding, [34](#)
- HWLOC_CPUBIND_THREAD
 - hwlocality_binding, [34](#)
- HWLOC_OBJ_CACHE
 - hwlocality_types, [19](#)
- HWLOC_OBJ_CORE
 - hwlocality_types, [19](#)
- HWLOC_OBJ_MACHINE

- hwlocality_types, 19
- HWLOC_OBJ_MISC
 - hwlocality_types, 19
- HWLOC_OBJ_NODE
 - hwlocality_types, 19
- HWLOC_OBJ_PROC
 - hwlocality_types, 19
- HWLOC_OBJ_SOCKET
 - hwlocality_types, 19
- HWLOC_OBJ_SYSTEM
 - hwlocality_types, 19
- HWLOC_TOPOLOGY_FLAG_IS_-
 - THISSYSTEM
 - hwlocality_configuration, 24
- HWLOC_TOPOLOGY_FLAG_-
 - WHOLE_SYSTEM
 - hwlocality_configuration, 24
- hwloc_compare_types
 - hwlocality_types, 19
- hwloc_const_cpuset_t
 - hwlocality_cpuset, 50
- hwloc_cpupbind_policy_t
 - hwlocality_binding, 34
- hwloc_cpuset_all_but_cpu
 - hwlocality_cpuset, 51
- hwloc_cpuset_alloc
 - hwlocality_cpuset, 51
- hwloc_cpuset_andset
 - hwlocality_cpuset, 51
- hwloc_cpuset_asprintf
 - hwlocality_cpuset, 51
- hwloc_cpuset_clearset
 - hwlocality_cpuset, 51
- hwloc_cpuset_clr
 - hwlocality_cpuset, 51
- hwloc_cpuset_compar
 - hwlocality_cpuset, 51
- hwloc_cpuset_compar_first
 - hwlocality_cpuset, 51
- hwloc_cpuset_copy
 - hwlocality_cpuset, 52
- hwloc_cpuset_cpu
 - hwlocality_cpuset, 52
- hwloc_cpuset_dup
 - hwlocality_cpuset, 52
- hwloc_cpuset_fill
 - hwlocality_cpuset, 52
- hwloc_cpuset_first
 - hwlocality_cpuset, 52
- hwloc_cpuset_foreach_begin
 - hwlocality_cpuset, 50
- hwloc_cpuset_foreach_end
 - hwlocality_cpuset, 50
- hwloc_cpuset_free
 - hwlocality_cpuset, 52
- hwloc_cpuset_from_glibc_sched_affinity
 - hwlocality_glibc_sched, 56
- hwloc_cpuset_from_ith_ulong
 - hwlocality_cpuset, 52
- hwloc_cpuset_from_linux_libnuma_-
 - bitmask
 - hwlocality_linux_libnuma_bitmask, 59
- hwloc_cpuset_from_linux_libnuma_-
 - nodemask
 - hwlocality_linux_libnuma_-
 - nodemask, 60
- hwloc_cpuset_from_linux_libnuma_-
 - ulongs
 - hwlocality_linux_libnuma_ulongs, 58
- hwloc_cpuset_from_string
 - hwlocality_cpuset, 52
- hwloc_cpuset_from_ulong
 - hwlocality_cpuset, 52
- hwloc_cpuset_intersects
 - hwlocality_cpuset, 53
- hwloc_cpuset_isequal
 - hwlocality_cpuset, 53
- hwloc_cpuset_isfull
 - hwlocality_cpuset, 53
- hwloc_cpuset_isincluded
 - hwlocality_cpuset, 53
- hwloc_cpuset_isset
 - hwlocality_cpuset, 53
- hwloc_cpuset_iszero
 - hwlocality_cpuset, 53
- hwloc_cpuset_last
 - hwlocality_cpuset, 53
- hwloc_cpuset_orset
 - hwlocality_cpuset, 53
- hwloc_cpuset_set

- hwlocality_cpuset, 53
- hwloc_cpuset_set_range
 - hwlocality_cpuset, 54
- hwloc_cpuset_singlify
 - hwlocality_cpuset, 54
- hwloc_cpuset_sprintf
 - hwlocality_cpuset, 54
- hwloc_cpuset_t
 - hwlocality_cpuset, 50
- hwloc_cpuset_to_glibc_sched_affinity
 - hwlocality_glibc_sched, 56
- hwloc_cpuset_to_ith_ulong
 - hwlocality_cpuset, 54
- hwloc_cpuset_to_linux_libnuma_
bitmask
 - hwlocality_linux_libnuma_bitmask,
59
- hwloc_cpuset_to_linux_libnuma_
nodemask
 - hwlocality_linux_libnuma_
nodemask, 60
- hwloc_cpuset_to_linux_libnuma_ulongs
 - hwlocality_linux_libnuma_ulongs,
58
- hwloc_cpuset_to_ulong
 - hwlocality_cpuset, 54
- hwloc_cpuset_weight
 - hwlocality_cpuset, 54
- hwloc_cpuset_xorset
 - hwlocality_cpuset, 54
- hwloc_cpuset_zero
 - hwlocality_cpuset, 55
- hwloc_distribute
 - hwlocality_helper_binding, 46
- hwloc_get_cache_covering_cpuset
 - hwlocality_helper_find_cache, 44
- hwloc_get_child_covering_cpuset
 - hwlocality_helper_find_covering, 42
- hwloc_get_closest_objs
 - hwlocality_helper_traversal, 45
- hwloc_get_common_ancestor_obj
 - hwlocality_helper_traversal_basic,
37
- hwloc_get_depth_type
 - hwlocality_information, 28
- hwloc_get_largest_objs_inside_cpuset
 - hwlocality_helper_find_inside, 39
- hwloc_get_nbobjs_by_depth
 - hwlocality_information, 28
- hwloc_get_nbobjs_by_type
 - hwlocality_information, 28
- hwloc_get_nbobjs_inside_cpuset_by_
depth
 - hwlocality_helper_find_inside, 40
- hwloc_get_nbobjs_inside_cpuset_by_
type
 - hwlocality_helper_find_inside, 40
- hwloc_get_next_child
 - hwlocality_helper_traversal_basic,
37
- hwloc_get_next_obj_by_depth
 - hwlocality_helper_traversal_basic,
37
- hwloc_get_next_obj_by_type
 - hwlocality_helper_traversal_basic,
38
- hwloc_get_next_obj_covering_cpuset_
by_depth
 - hwlocality_helper_find_coverings,
43
- hwloc_get_next_obj_covering_cpuset_
by_type
 - hwlocality_helper_find_coverings,
43
- hwloc_get_next_obj_inside_cpuset_by_
depth
 - hwlocality_helper_find_inside, 40
- hwloc_get_next_obj_inside_cpuset_by_
type
 - hwlocality_helper_find_inside, 40
- hwloc_get_obj_by_depth
 - hwlocality_traversal, 30
- hwloc_get_obj_by_type
 - hwlocality_traversal, 30
- hwloc_get_obj_covering_cpuset
 - hwlocality_helper_find_covering, 42
- hwloc_get_obj_inside_cpuset_by_depth
 - hwlocality_helper_find_inside, 40
- hwloc_get_obj_inside_cpuset_by_type
 - hwlocality_helper_find_inside, 40
- hwloc_get_shared_cache_covering_obj
 - hwlocality_helper_find_cache, 44

- hwloc_get_system_obj
 - hwlocality_helper_traversal_basic, 38
- hwloc_get_type_depth
 - hwlocality_information, 28
- hwloc_get_type_or_above_depth
 - hwlocality_helper_types, 36
- hwloc_get_type_or_below_depth
 - hwlocality_helper_types, 36
- hwloc_ibv_get_device_cpuset
 - hwloc_openfabrics, 61
- hwloc_linux_parse_cpumap_file
 - hwlocality_linux_cpumap, 57
- hwloc_obj, 69
 - arity, 70
 - attr, 70
 - children, 70
 - cpuset, 70
 - depth, 71
 - father, 71
 - first_child, 71
 - last_child, 71
 - logical_index, 71
 - name, 71
 - next_cousin, 71
 - next_sibling, 71
 - os_index, 71
 - os_level, 71
 - prev_cousin, 72
 - prev_sibling, 72
 - sibling_rank, 72
 - type, 72
 - userdata, 72
- hwloc_obj_attr_u::hwloc_cache_attr_s, 63
 - depth, 63
 - memory_kB, 63
- hwloc_obj_attr_u::hwloc_machine_attr_s, 65
 - dmi_board_name, 65
 - dmi_board_vendor, 65
 - huge_page_free, 65
 - huge_page_size_kB, 66
 - memory_kB, 66
- hwloc_obj_attr_u::hwloc_memory_attr_s, 67
 - huge_page_free, 67
 - memory_kB, 67
- hwloc_obj_attr_u::hwloc_misc_attr_s, 68
 - depth, 68
- hwloc_obj_cpuset_snprintf
 - hwlocality_conversion, 31
- hwloc_obj_is_in_subtree
 - hwlocality_helper_traversal_basic, 38
- hwloc_obj_snprintf
 - hwlocality_conversion, 31
- hwloc_obj_t
 - hwlocality_objects, 20
- hwloc_obj_type_of_string
 - hwlocality_conversion, 31
- hwloc_obj_type_string
 - hwlocality_conversion, 32
- hwloc_obj_type_t
 - hwlocality_types, 18
- hwloc_openfabrics
 - hwloc_ibv_get_device_cpuset, 61
- hwloc_set_cpupbind
 - hwlocality_binding, 34
- hwloc_set_proc_cpupbind
 - hwlocality_binding, 34
- hwloc_set_thread_cpupbind
 - hwlocality_binding, 35
- hwloc_topology_check
 - hwlocality_creation, 21
- hwloc_topology_destroy
 - hwlocality_creation, 21
- hwloc_topology_flags_e
 - hwlocality_configuration, 24
- hwloc_topology_get_depth
 - hwlocality_information, 28
- hwloc_topology_ignore_all_keep_structure
 - hwlocality_configuration, 24
- hwloc_topology_ignore_type
 - hwlocality_configuration, 24

- hwloc_topology_ignore_type_keep_-
 structure
 - hwlocality_configuration, 24
- hwloc_topology_init
 - hwlocality_creation, 21
- hwloc_topology_is_thissystem
 - hwlocality_information, 28
- hwloc_topology_load
 - hwlocality_creation, 22
- hwloc_topology_set_flags
 - hwlocality_configuration, 25
- hwloc_topology_set_fsroot
 - hwlocality_configuration, 25
- hwloc_topology_set_synthetic
 - hwlocality_configuration, 25
- hwloc_topology_set_xml
 - hwlocality_configuration, 25
- hwloc_topology_t
 - hwlocality_topology, 17
- HWLOC_TYPE_DEPTH_MULTIPLE
 - hwlocality_information, 27
- HWLOC_TYPE_DEPTH_UNKNOWN
 - hwlocality_information, 27
- HWLOC_TYPE_UNORDERED
 - hwlocality_types, 18
- hwlocality_binding
 - HWLOC_CPUBIND_PROCESS, 34
 - HWLOC_CPUBIND_STRICT, 34
 - HWLOC_CPUBIND_THREAD, 34
- hwlocality_configuration
 - HWLOC_TOPOLOGY_FLAG_-
 IS_THISSYSTEM, 24
 - HWLOC_TOPOLOGY_FLAG_-
 WHOLE_SYSTEM, 24
- hwlocality_types
 - HWLOC_OBJ_CACHE, 19
 - HWLOC_OBJ_CORE, 19
 - HWLOC_OBJ_MACHINE, 19
 - HWLOC_OBJ_MISC, 19
 - HWLOC_OBJ_NODE, 19
 - HWLOC_OBJ_PROC, 19
 - HWLOC_OBJ_SOCKET, 19
 - HWLOC_OBJ_SYSTEM, 19
- hwlocality_binding
 - hwloc_cpupbind_policy_t, 34
- hwloc_set_cpupbind, 34
- hwloc_set_proc_cpupbind, 34
- hwloc_set_thread_cpupbind, 35
- hwlocality_configuration
 - hwloc_topology_flags_e, 24
 - hwloc_topology_ignore_all_keep_-
 structure, 24
 - hwloc_topology_ignore_type, 24
 - hwloc_topology_ignore_type_-
 keep_structure, 24
 - hwloc_topology_set_flags, 25
 - hwloc_topology_set_fsroot, 25
 - hwloc_topology_set_synthetic, 25
 - hwloc_topology_set_xml, 25
- hwlocality_conversion
 - hwloc_obj_cpuset_sprintf, 31
 - hwloc_obj_sprintf, 31
 - hwloc_obj_type_of_string, 31
 - hwloc_obj_type_string, 32
- hwlocality_cpuset
 - hwloc_const_cpuset_t, 50
 - hwloc_cpuset_all_but_cpu, 51
 - hwloc_cpuset_alloc, 51
 - hwloc_cpuset_andset, 51
 - hwloc_cpuset_asprintf, 51
 - hwloc_cpuset_clearset, 51
 - hwloc_cpuset_clr, 51
 - hwloc_cpuset_compar, 51
 - hwloc_cpuset_compar_first, 51
 - hwloc_cpuset_copy, 52
 - hwloc_cpuset_cpu, 52
 - hwloc_cpuset_dup, 52
 - hwloc_cpuset_fill, 52
 - hwloc_cpuset_first, 52
 - hwloc_cpuset_foreach_begin, 50
 - hwloc_cpuset_foreach_end, 50
 - hwloc_cpuset_free, 52
 - hwloc_cpuset_from_ith_ulong, 52
 - hwloc_cpuset_from_string, 52
 - hwloc_cpuset_from_ulong, 52
 - hwloc_cpuset_intersects, 53
 - hwloc_cpuset_isequal, 53
 - hwloc_cpuset_isfull, 53
 - hwloc_cpuset_isincluded, 53
 - hwloc_cpuset_isset, 53
 - hwloc_cpuset_iszero, 53

- hwloc_cpuset_last, [53](#)
- hwloc_cpuset_orset, [53](#)
- hwloc_cpuset_set, [53](#)
- hwloc_cpuset_set_range, [54](#)
- hwloc_cpuset_singlify, [54](#)
- hwloc_cpuset_snprintf, [54](#)
- hwloc_cpuset_t, [50](#)
- hwloc_cpuset_to_ith_ulong, [54](#)
- hwloc_cpuset_to_ulong, [54](#)
- hwloc_cpuset_weight, [54](#)
- hwloc_cpuset_xorset, [54](#)
- hwloc_cpuset_zero, [55](#)
- hwlocality_creation
 - hwloc_topology_check, [21](#)
 - hwloc_topology_destroy, [21](#)
 - hwloc_topology_init, [21](#)
 - hwloc_topology_load, [22](#)
- hwlocality_glibc_sched
 - hwloc_cpuset_from_glibc_sched_-
affinity, [56](#)
 - hwloc_cpuset_to_glibc_sched_-
affinity, [56](#)
- hwlocality_helper_binding
 - hwloc_distribute, [46](#)
- hwlocality_helper_find_cache
 - hwloc_get_cache_covering_cpuset,
[44](#)
 - hwloc_get_shared_cache_-
covering_obj, [44](#)
- hwlocality_helper_find_covering
 - hwloc_get_child_covering_cpuset,
[42](#)
 - hwloc_get_obj_covering_cpuset, [42](#)
- hwlocality_helper_find_coverings
 - hwloc_get_next_obj_covering_-
cpuset_by_depth, [43](#)
 - hwloc_get_next_obj_covering_-
cpuset_by_type, [43](#)
- hwlocality_helper_find_inside
 - hwloc_get_largest_objs_inside_-
cpuset, [39](#)
 - hwloc_get_nbobjs_inside_cpuset_-
by_depth, [40](#)
 - hwloc_get_nbobjs_inside_cpuset_-
by_type, [40](#)
- hwloc_get_next_obj_inside_-
cpuset_by_depth, [40](#)
- hwloc_get_next_obj_inside_-
cpuset_by_type, [40](#)
- hwloc_get_obj_inside_cpuset_by_-
depth, [40](#)
- hwloc_get_obj_inside_cpuset_by_-
type, [40](#)
- hwlocality_helper_traversal
 - hwloc_get_closest_objs, [45](#)
- hwlocality_helper_traversal_basic
 - hwloc_get_common_ancestor_obj,
[37](#)
 - hwloc_get_next_child, [37](#)
 - hwloc_get_next_obj_by_depth, [37](#)
 - hwloc_get_next_obj_by_type, [38](#)
 - hwloc_get_system_obj, [38](#)
 - hwloc_obj_is_in_subtree, [38](#)
- hwlocality_helper_types
 - hwloc_get_type_or_above_depth,
[36](#)
 - hwloc_get_type_or_below_depth,
[36](#)
- hwlocality_information
 - hwloc_get_depth_type, [28](#)
 - hwloc_get_nbobjs_by_depth, [28](#)
 - hwloc_get_nbobjs_by_type, [28](#)
 - hwloc_get_type_depth, [28](#)
 - hwloc_topology_get_depth, [28](#)
 - hwloc_topology_is_thissystem, [28](#)
 - HWLOC_TYPE_DEPTH_-
MULTIPLE, [27](#)
 - HWLOC_TYPE_DEPTH_-
UNKNOWN, [27](#)
- hwlocality_linux_cpumap
 - hwloc_linux_parse_cpumap_file, [57](#)
- hwlocality_linux_libnuma_bitmask
 - hwloc_cpuset_from_linux_-
libnuma_bitmask, [59](#)
 - hwloc_cpuset_to_linux_libnuma_-
bitmask, [59](#)
- hwlocality_linux_libnuma_nodemask
 - hwloc_cpuset_from_linux_-
libnuma_nodemask, [60](#)
 - hwloc_cpuset_to_linux_libnuma_-
nodemask, [60](#)

- hwlocality_linux_libnuma_ulongsg
 - hwloc_cpuset_from_linux_-libnuma_ulongsg, 58
 - hwloc_cpuset_to_linux_libnuma_-ulongsg, 58
- hwlocality_objects
 - hwloc_obj_t, 20
- hwlocality_topology
 - hwloc_topology_t, 17
- hwlocality_traversal
 - hwloc_get_obj_by_depth, 30
 - hwloc_get_obj_by_type, 30
- hwlocality_types
 - hwloc_compare_types, 19
 - hwloc_obj_type_t, 18
 - HWLOC_TYPE_UNORDERED, 18
- last_child
 - hwloc_obj, 71
- logical_index
 - hwloc_obj, 71
- machine
 - hwloc_obj_attr_u, 74
- memory_kB
 - hwloc_obj_attr_u::hwloc_cache_-attr_sg, 63
 - hwloc_obj_attr_u::hwloc_-machine_attr_sg, 66
 - hwloc_obj_attr_u::hwloc_memory_-attr_sg, 67
- misc
 - hwloc_obj_attr_u, 74
- name
 - hwloc_obj, 71
- next_cousin
 - hwloc_obj, 71
- next_sibling
 - hwloc_obj, 71
- node
 - hwloc_obj_attr_u, 74
- Object Type Helpers, 36
- Object/String Conversion, 31
- OpenFabrics-Specific Functions, 61
- os_index
 - hwloc_obj, 71
- os_level
 - hwloc_obj, 71
- prev_cousin
 - hwloc_obj, 72
- prev_sibling
 - hwloc_obj, 72
- Retrieve Objects, 30
- sibling_rank
 - hwloc_obj, 72
- system
 - hwloc_obj_attr_u, 74
- The Cpuset API, 47
- Topology context, 17
- Topology Object Types, 18
- Topology Objects, 20
- type
 - hwloc_obj, 72
- userdata
 - hwloc_obj, 72